



Combination Hammer with Self Dust Collection System

HR2652 / HR2653 / HR2653T / HR2663

26 mm (1"), SDS-PLUS bits



Adapted for SDS-PLUS bits



with filter cleaning mechanism

HEPA filter



photo : HR2652

HR2652



HR2653

AVT



HR2653T

AVT



HR2663


AVT



Quick change drill chuck

AVT HEPA filter

HEPA filter

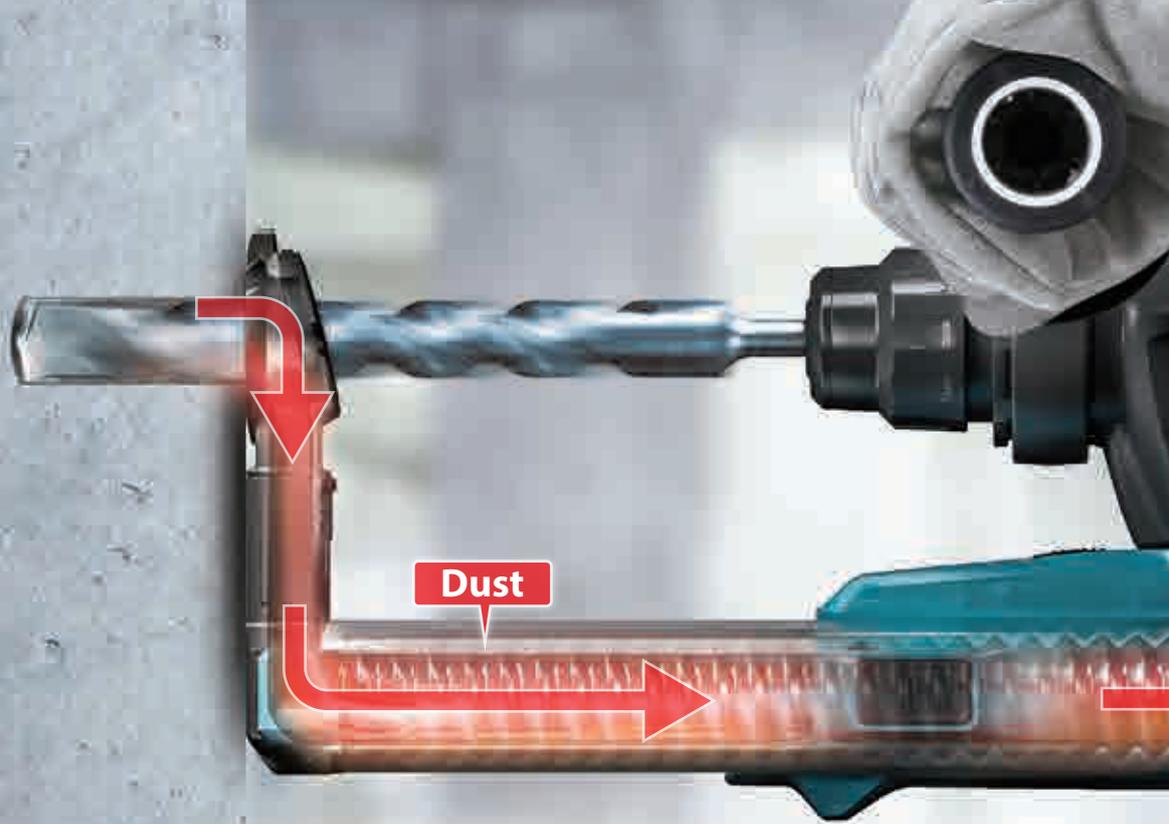


Filter cleaning mechanism

by turning the dial, the dust falls off from the filter



High dust collection performance for overhead application

Dust collection rate for overhead application

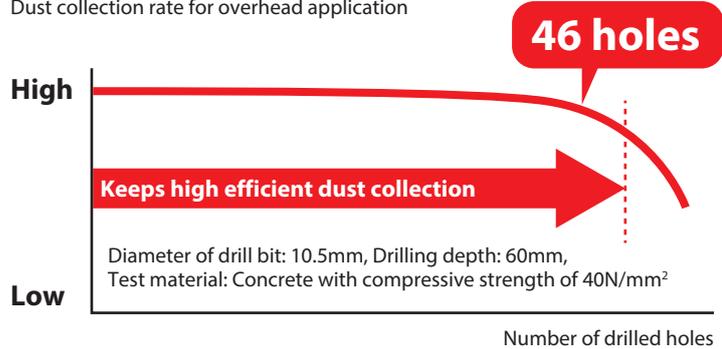

Large Fan Provides Incredibly High Dust Extraction Power



65 mm

High rotation speed
20,900
 min⁻¹



Clean air



Filter plate
Filter plate is engineered to prevent debris entering into motor when using without dust collection system

photo : HR2652

Enables to accept longer drill bits

Adjustable drilling depth

Telescopic guide also functions as a depth gauge. A desired drilling depth can be adjusted simply by sliding a push button on the guide to the desired point.



Position adjustment of Dust Extraction Inlet

one action adjustment according to bit length simply by pushing a single push button



Secure connection between dust case and dust collecting section allows for less dust leakage

Easy disposal of dust and easy cleaning of dust case

- Dust case cover is easy to open/close with a single operation of a locking tab
- Wide opening of dust case



Dust case
Part No. 199555-1


Transparent dust case for easy checking of collected dust amount

Extremely low vibration achieved by ...


AVT
ANTI VIBRATION TECHNOLOGY




1 Damper spring
absorbs reaction force of impact energy.

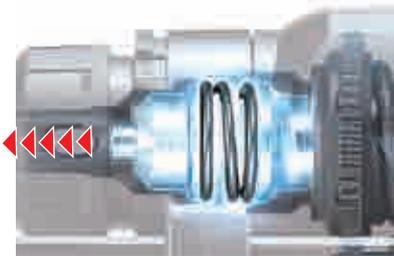

2 Counterweight mechanism
reduces vibration by moving a counterweight in the opposite direction of the piston.

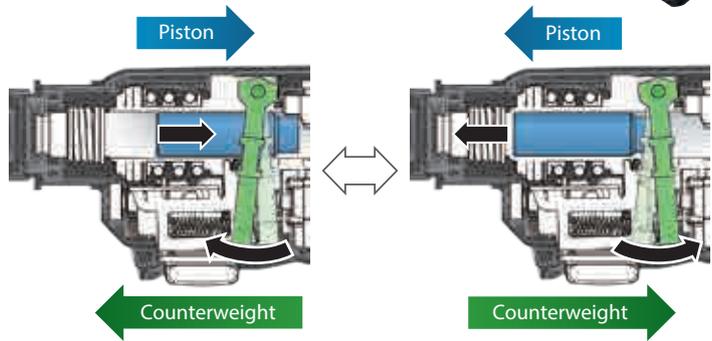

Detachable Dust collection system

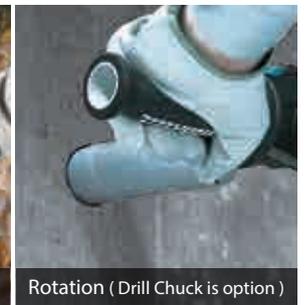

Combination Hammer with Self Dust Collection

HR2652 / HR2653 / HR2653T / HR2663 26 mm (1"), Adapted for SDS-PLUS bits **HR2652 / HR2653 / T 325** **HR2663 419**

	HR2652	HR2653	HR2653T	HR2663
Double Insulation	800W	800W	800W	800W
Variable Speed	EPTA-Procedure 05/2009 : 2.2 J	EPTA-Procedure 05/2009 : 2.2 J	EPTA-Procedure 05/2009 : 2.2 J	EPTA-Procedure 05/2009 : 2.2 J
Reversing	Concrete : 26 mm (1")	Concrete : 26 mm (1")	Concrete : 26 mm (1")	Concrete : 26 mm (1")
SDS-PLUS Shank	Steel : 13 mm (1/2")	Steel : 13 mm (1/2")	Steel : 13 mm (1/2")	Steel : 13 mm (1/2")
Torque Limiter	Wood : 32 mm (1-1/4")	Wood : 32 mm (1-1/4")	Wood : 32 mm (1-1/4")	Wood : 32 mm (1-1/4")
Dust Collection	Blows Per Minute (BPM) 0 - 4,600	0 - 4,600	0 - 4,600	0 - 4,500
Carrying Case	No Load Speed (RPM) 0 - 1,200	0 - 1,200	0 - 1,200	0 - 1,100
	Sound Pressure Level 91 dB(A)	92 dB(A)	92 dB(A)	90 dB(A)
	Sound Power Level 102 dB(A)	103 dB(A)	103 dB(A)	101 dB(A)
	Vibration Level Hammer Drilling into Concrete : 12.5 m/s ²	Hammer Drilling into Concrete : 11.5 m/s ²	Hammer Drilling into Concrete : 11.5 m/s ²	Hammer Drilling into Concrete : 9.5 m/s ²
	Drilling Into Metal : 2.5 m/s ²	Drilling Into Metal : 2.5 m/s ²	Drilling Into Metal : 2.5 m/s ²	Drilling Into Metal : 2.5 m/s ² or less
	Dimensions (L x W x H) 604x89x260 mm (23-3/4"x3-1/2"x10-1/4")	604x89x260 mm (23-3/4"x3-1/2"x10-1/4")	630x89x260 mm (24-3/4"x3-1/2"x10-1/4")	666x89x260 mm (26-1/4"x3-1/2"x10-1/4")
	Net weight 3 - 4.3 kg (6.7 - 9.4 lbs.)	3.1 - 4.3 kg (6.9 - 9.6 lbs.)	3.2 - 4.5 kg (7.2 - 9.9 lbs.)	3.3 - 4.6 kg (7.3 - 10.0 lbs.)
	Power supply cord 2.5 m (8.2 ft.)	2.5 m (8.2 ft.)	2.5 m (8.2 ft.)	2.5 m (8.2 ft.)
	Standard Equipment : Side Grip, Depth Gauge, Sealing Cap			

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 201810