



**Cordless Rotary Hammer**  
**DHR400N** 40 mm (1-9/16")

Satisfy Professional's Needs



Adapted for  
SDS-MAX bits

# High Power similar to AC Tool

with Active Feedback  
sensing Technology

Extra Comfort with low level of vibration

**18v + 18v → 36v**



**AVT** **SOFT NOLOAD** **BL MOTOR** **AFT** **AWS** **XPT**



Adapted for  
SDS-MAX bits

# Excellent performance equivalent to AC Model

**18v + 18v → 36v**

Newly developed BL motor  
delivers high power



## Drilling work amount

Work volume on a single full battery charge

About **25** holes

- ◆ w/ T.C.T. bit Ø18mm
- ◆ Depth : 140mm
- ◆ Concrete : 40 N / mm<sup>2</sup>
- ◆ Battery : BL1850Bx2

## Demolition work

with bull point

### Impact Energy

[ EPTA-Procedure 05/2009 ]

**8.0 J**

Makita HR4013C 8.0J



# AVT & SOFT NO LOAD

ANTI VIBRATION TECHNOLOGY

Vibration absorbing housing isolates handle and motor.

Active dynamic vibration absorber moves in the opposite direction to the drive piston to reduce vibration.

Damper spring absorbs impact vibrations from the drill bit.



■ Comparison of Vibration level\* and Time to reach ELV (Exposure Limit of Vibration)\*\*

\* It is known as the tri-axial value and value at Directive of A(8).

\*\*It means the maximum amount of vibration that an operator may be exposed to on any single day.

	Time to reach ELV (min)			
	100	200	550	
Makita DHR400N	5.0m/s <sup>2</sup>		540min	
Makita HR4013C	5.0m/s <sup>2</sup>		540min	
Vibration level (m/s <sup>2</sup> )	0	5	10	15

**AWS**  
Auto-start Wireless System



Wireless unit

Part No.  
198901-5, 198900-7(EU)  
199393-1(Asia)

**Bluetooth**



DVC864

Switch on the tool  
Vacuum cleaner is activated

AWS connects to power tool via Bluetooth.

Wireless unit



**Bluetooth**

The Bluetooth® word mark and logos are registered trademarks owned by the Bluetooth SIG, Inc. and any use of such marks by Makita is under license. Other trademarks and trade names are those of their respective owners.

Expand AWS Line-up

**AWS**




DVC864

**Bluetooth**



### Variable speed control dial

allows operator to adjust cutting speed depending on material or application.




### Dual LED job lights

## Active Feedback sensing Technology

# AFT

Torque limiter turns the motor off if the tool is suddenly forced to lock

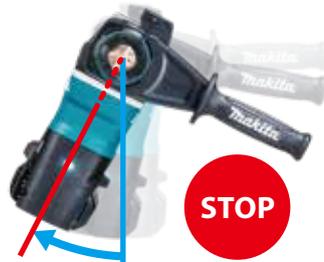

# XPT


EXTREME PROTECTION TECHNOLOGY

Dust and drip-proof performance is enhanced for use in outdoor applications or harsh environments.

## Accessories

### Dust Extractor Attachment Set

Part No. 199142-6

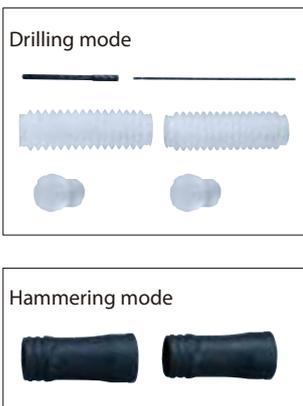

### Dust Extractor Attachment Set Hammering only

without Vacuum hose set  
Part No. 199143-4

with Vacuum hose set  
Part No. 199144-2



## Cordless Rotary Hammer DHR400N 40 mm (1-9/16")

- Variable Speed
- Brake
- Reversing
- SDS-MAX Shank
- Torque Limiter
- Constant Speed
- Soft Start
- Dust Collection
- Built-in Job Light
- Carrying Case

<b>Impact Energy</b>	EPTA-Procedure 05/2009: 8.0 J Our experimental conditions: 11.4 J
<b>Capacity</b>	Concrete (w/ T.C.T. bit): 40 mm (1-9/16") Concrete (w/ Core bit): 105 mm (4-1/8")
<b>Blows Per Minute (BPM)</b>	1,450 - 2,900
<b>No Load Speed (RPM)</b>	250 - 500
<b>Sound Pressure Level</b>	91 dB(A)
<b>Sound Power Level</b>	102 dB(A)
<b>Vibration Level</b>	Hammer Drilling Into Concrete: 5.0 m/s <sup>2</sup>
<b>Dimensions (L x W x H)</b>	473x120x285 mm (18-5/8"x4-3/4"x11-1/4")
<b>Net weight</b>	7.3 - 8.1 kg (16.1 - 17.9 lbs)

### Standard Equipment :

Side Handle, Side Grip, Depth Gauge, Bit Grease, Cloth, Wireless Unit (country-specific), Battery, Charger

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area.

# Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 201810