



# Recipro Saw JR3051T



**High power and more compact**

# Smooth cutting

in wood and metal cutting applications

Short overall length: 447mm



**Fixed shoe**  
For added durability

**Longer 30 mm (1-3/16") stroke**  
for faster cutting performance

**Large 2-finger trigger**  
for added convenience

**Soft grip**  
handle provides increased comfort on the job.


**Toolless blade change**  
for fast blade installation and removal

## Accessory

**Hook set**  
allows to hang the machine on ladder rungs or guard rails of aerial work platform. (country-specific)



Part No. 191C05-0

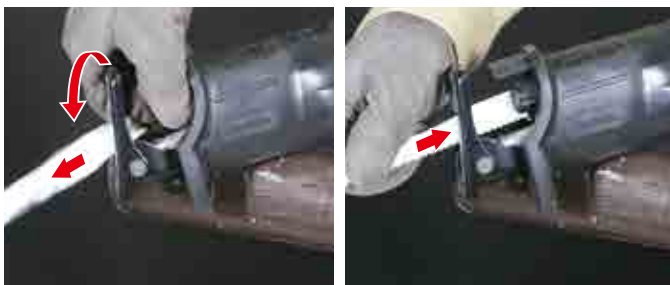

Recipro Saw	JR3051T	303 mm
Double Insulation	<b>Continuous Rating Input</b>	1,200W
Variable Speed	<b>Length of Stroke</b>	30 mm (1-3/16")
Carrying Case	<b>Strokes Per Minute (SPM)</b>	0 - 3,000
<b>Standard Equipment:</b> Recipro Saw Blades	<b>Capacity</b>	Pipe: 130 mm (5-1/8") Wood: 255 mm (10")
	<b>Vibration Level</b>	Cutting Boards: 19.5 m/s <sup>2</sup> Cutting Wooden Beams: 19.5 m/s <sup>2</sup>
	<b>Sound Pressure Level</b>	88 dB(A)
	<b>Sound Power Level</b>	99 dB(A)
	<b>Dimensions (L x W x H)</b>	447x97x176 mm (17-5/8"x3-13/16"x6-15/16")
	<b>Net weight</b>	3.2 - 3.3 kg (7.1 - 7.3 lbs.)
	<b>Power Supply Cord</b>	2.5 m (8.2 ft)

The weight may differ depending on the attachment(s).  
The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table.  
Items of standard equipment and specifications may vary by country or area.

**Makita Corporation**

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 202002