



Cordless Fan
CF001G 40Vmax / AC



40V Li-ion max

Noise level
48 dB (A)
[in High speed]

**Quiet running
&
Powerful wind**



190 Max air speed | **∅235** Fan diameter
m/min mm



Automatic oscillation



ON / OFF switch

3 Wind speed settings (High/Medium/Low)

- Independent of ON / OFF button
- Resumes at the speed set in last operation.
- With LED indicator

Off timer switch

- 3 Off timer settings: 1 hour, 2 hours, 4 hours
- with LED display

Charging Time Reference


 	<p>DC40RA</p> <p>The enlarged and raised LED light provides clearer indication of charging status.</p> 	
 <p>BL4025 2.5Ah</p>	<p>28min</p>	
 <p>BL4040 4.0Ah</p>	<p>45min</p>	

Automatic oscillation



Left / Right 45°

Adjustable fan head angle

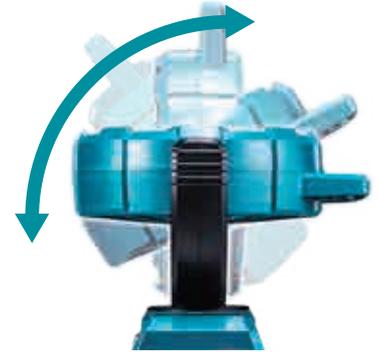

Up 90°, Down 45°,
Left / Right 90°

Quiet running

Changed the shape of corner rear fan cover to take the air smoothly to reduce the noise.



CF001G



Predecessor Model

Easy-to-clean-up fan blades

Front cover is removable simply by removing a single screw, allowing for convenient clean up.



Carrying handle



AC adapter jack



Cordless Fan

CF001G 40Vmax / AC

 Electronic 3-Speed	Continuous Use (min.) w/ BL4040 Low / Mid / High: 1,160 / 880 / 660 w/ BL4025 Low / Mid / High: 730 / 550 / 410
	Continuous Use (min.) w/ BL4040 Low / Mid / High: 1,055 / 800 / 600 w/ BL4025 Low / Mid / High: 665 / 500 / 370
Max Air Velocity High / Mid / Low: 190 / 150 / 120 m/min	Air Flow High / Mid / Low: 8.2 / 6.5 / 5.2 m ³ /min
Fan Diameter 235 mm (9-1/4")	Dimensions (L x W x H) 143x333x463 mm (5-5/8"x13"x18-1/4")
Net weight 2.0 - 3.0 kg (4.4 - 6.6 lbs.)	

Standard Equipment : AC Adaptor

*The weight may differ depending on the attachment(s), including the battery cartridge.
Items of standard equipment and specifications may vary by country or area.*

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 202005