



Cordless Angle Grinder
GA035G, GA036G 150 mm (6")



40V Li-ion max

Delivers the same power as 1,000W corded grinders

150mm 40Vmax Angle Grinder





GA035G

Slide switch




GA036G

Paddle switch



AFT Active Feedback sensing Technology

Shuts down the tool, if the rotation speed suddenly slows down.

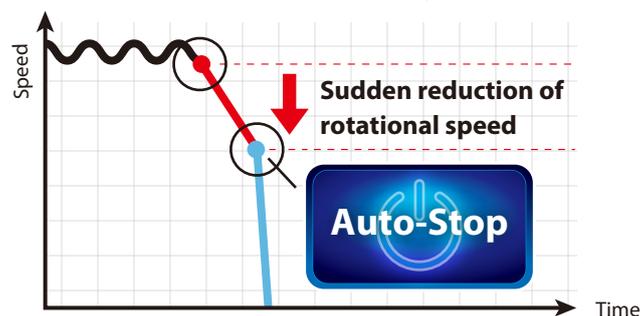

Accessories

Wheel cover

for cut-off wheel

Part No. 162947-7

140X62-1(for US)



Vibration proof grip set


Part No. 194514-0



High power

40Vmax XGT Li-ion battery and BL motor deliver sufficient power even to rotate a 150mm wheel.


BL
MOTOR

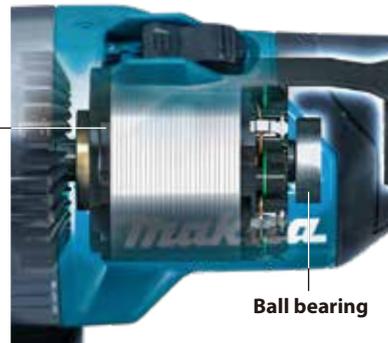

Ball bearing

New toolless wheel cover (Slide lever style)

allows for fast and easy angle adjustment and installation / removal of wheel cover.

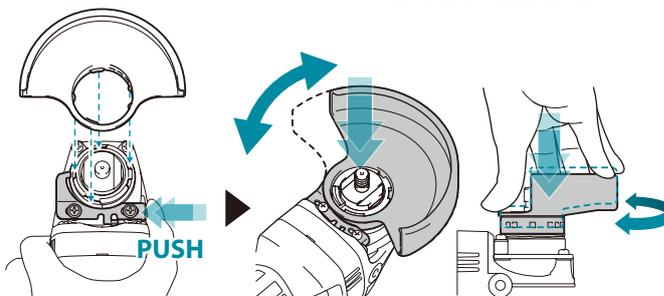

XPT

eXtreme Protection Technology



Electric brake

maximizes productivity and increases safety for operator

Cordless Angle Grinder

GA035G, GA036G 150 mm (6")

	GA035G/ GA036G
Brake	150 mm (6")
Soft Start	22.23 mm (7/8")
Dust Collection	8,500
Standard Equipment :	
Grinding Wheel,	146 mm (5-3/4") / 151 mm (5-15/16")
Toolless Wheel	
Cover, Side Grip,	Surface Grinding w/ Normal Side Grip:
Lock Nut Wrench	7.0 m/s ² / 9.0 m/s ²
	Surface Grinding w/ Anti-Vibration Side Grip:
	9.5 m/s ² / 9.0 m/s ²
	Disc Sanding w/ Normal Side Grip:
	4.5 m/s ² / 4.0 m/s ²
	Disc Sanding w/ Anti-Vibration Side Grip:
	4.0 m/s ² / 3.5 m/s ²
Sound Pressure Level	82 dB(A)
Sound Power Level	93 dB(A)
Dimensions	
(L x W x H)	w/ BL4020 / BL4025: 398 x 171 x 156 mm
	(15-5/8 x 6-3/4 x 6-1/8")
	w/ BL4040: 410 x 171 x 168 mm
	(16-1/8 x 6-3/4 x 6-5/8")
Net weight	3.0 - 4.0 kg (6.6 - 8.8 lbs.)

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 202012