



Cordless Blower
UB001G



40V Li-ion
max

**Lightweight
but
High power**

**Powerful
blowing force**

Max 17 N*

*Boost mode



Net weight


3.1 kg

with BL4025



Less kickback but powerful blowing

Nozzle is designed so that its end points downward. This small change can displace the reaction force towards the handle side to minimize the return tilting action of the machine, reducing user's arm fatigue.

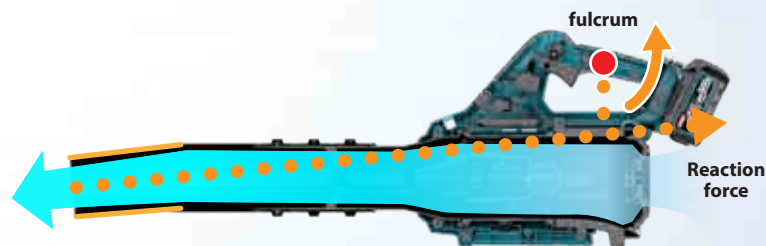

BL MOTOR

Lightweight design

Improvement in power efficiency makes BL motor more compact and lightweight.

Net weight
3.1 kg
with BL4025



Low noise level

Smoother airflow, which is achieved by redesigning the position of controller and the air intake port, decreases noise while increasing blowing force.

Noise level
at max blowing force
59 dB
ANSI measurement standard



Boost mode

To use the machine in the Boost mode, pull the switch trigger until the switch trigger stops in the halfway position, and then pull the switch trigger fully.

Blowing Force

17 N



Variable speed control by trigger

Available operation time	
Time per run*1 0.5-5 min	Cumulative operation time*2 6 min
with BL4040	

Usage time of Boost mode is restricted to protect the machine. Available operation time in boost mode, under environment temperature of 25°C


*1 Max time per run is at least 30 seconds or longer and depends on usage environment.
*2 Total operation time when the machine was intermittently used in Boost mode only.

Variable control trigger + Cruise control lever

Blowing Force

0~12 N

Cruise control lever



Variable speed control by trigger

Cruise control lever allows you to lock the variable speed control trigger at a desired power level.

Over blowing but less kickback



WG
WET GUARD



High water-resistance allows to operate the machine even if it is wet with water.

3-stage telescopic long nozzle with an adjustment range of 100mm (4")



Best grip-to-frame angle



Hole on the bottom of housing for hanging

Easy-to-hold machine bottom design for added comfort and control in double handed operation




High Power
Durability
Digital Communication



Rotary Hammer
HR006G



Demolition Hammer
HM002G

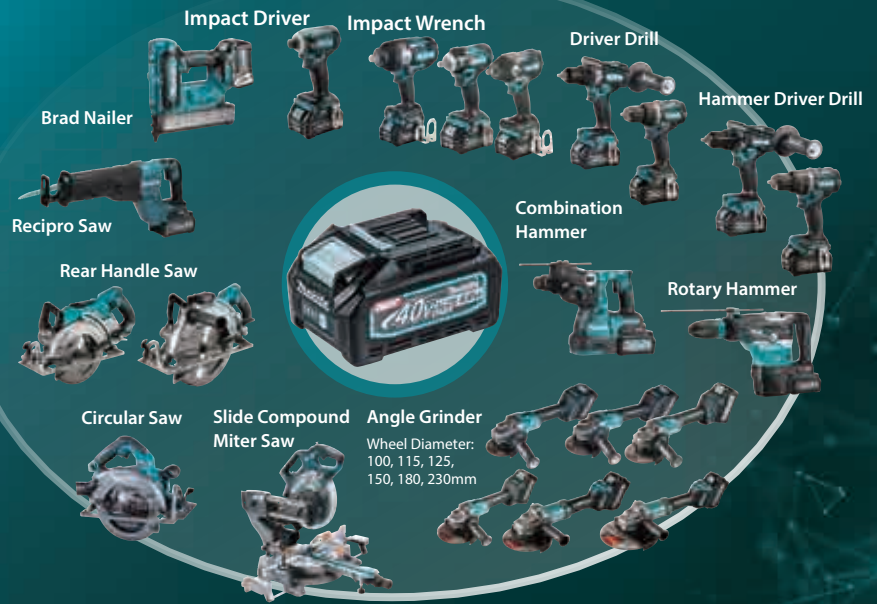

Portable Power Pack

PDC01



Powered by up to four 18V LXT batteries



PDC1200



Powered by 36V-40Vmax built-in battery

Charger: DC4001

Charging time: 6hours



Adapter set (40Vmax)

Part No. 191N62-4



Adapter between Battery box of Portable power pack and Product on 40Vmax XGT platform



Accessories

Adapter pipe 85-72 set

Part No. 191L96-5



Extension nozzle set *

Part No. 197888-8



Flat nozzle set *

Part No. 197889-6

Narrow profile improves air speed for removing heavier debris such as wet leaves



Gutter nozzle set *

Part No. 191B03-8



End nozzle 80 set

Part No. 191P97-7

For blowing fallen leaves



Shoulder Belt

Part No. 166094-6



*Use with Adapter pipe 85-72 set (Part No. 191L96-5)


Extension nozzle set



Flat nozzle set



Gutter nozzle set



Adapter pipe 85-72 set

Cordless Blower UB001G

- Variable Speed
- Constant Speed
- Soft Start

Standard Equipment :

Shoulder Belt, End Nozzle, Flat Nozzle, Extension Nozzle (country-specific), Adapter Pipe (country-specific), Battery, Charger

Max Air Volume	Cruise Control Mode: 0 - 13.5 m ³ /min Boost Mode: 16.0 m ³ /min
Max Air Velocity	Cruise Control Mode: 53 m/s Boost Mode: 64 m/s
Blowing Force	Cruise Control Mode: 0 - 12 N Boost Mode: 17 N
No Load Speed (RPM)	Cruise Control Mode: 0 - 20,000 Boost Mode: 23,000
Sound Pressure Level	83.7 dB(A)
Sound Power Level	94.1 dB(A)
Vibration Level	2.5 m/s ² or less
Dimensions (L x W x H)	w/ BL4040: 917 - 1,017 x 167 x 297 mm (36 - 40 x 6-9/16 x 11-3/4")
Net weight	3.1 - 3.9 kg (6.8 - 8.6 lbs.)

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 202103