



# Cordless Rotary Hammer HR006G 52 mm (2-1/16")



 Adapted for SDS-MAX bits



**40V<sup>Li-ion</sup>max** + **40V<sup>Li-ion</sup>max**



# Cordless / More powerful than corded tools

Impact energy  
[EPTA-Procedure 05/2009]  
**21.4**  
Joule



40V Li-ion max + 40V Li-ion max

**XGT X2**  
80V max



**2**  
mode

Rotation +  
Hammering

Hammering

A

# AVT

ANTI VIBRATION TECHNOLOGY

Vibration level at main handle

**8.5 m/s<sup>2</sup>**

C

Impact energy  
[EPTA-Procedure 05/2009]

**21.4**  
Joule



**A** Active dynamic vibration absorber moves in the opposite direction to the drive piston to reduce vibration.

**B** Vibration absorbing housing isolates handle and motor.

**C** Damper spring absorbs impact vibrations from the drill bit.

Drilling speed\*

about **27%**  
UP

Work amount\*  
[ Drilling ]

about **44** pcs

Drilling speed

HR006G	<b>127</b>
AC tool	100

slow speed fast

\*on a full battery charge / with battery: BL4040 x2 / concrete with compressive strength of 40N/mm<sup>2</sup> / drilled holes to a depth of 140 mm / Ø18mm

**SOFT NOLOAD**

Suppression of motor speed during no-load

**XPT**

eXtreme Protection Technology





**B**


# AFT Active Feedback sensing Technology

turns the motor off if bit rotation is suddenly forced to stop.



# AWS Auto-start Wireless System

connects to compatible vacuum cleaner with Bluetooth. The vacuum cleaner automatically runs while the switch is on.

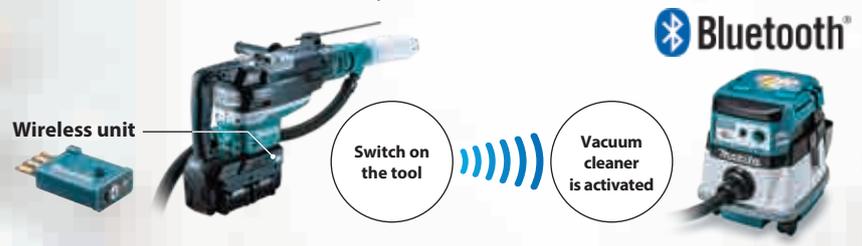

Type

Side grip



Side handle



**BL MOTOR**

Twin LED job lights



Variable speed control dial





40Vmax  
series  
movie



40Vmax  
mechanism  
movie



This movie was filmed  
in Japan.  
Models and specs may  
vary by country.

## Cordless Hammer Series



Rotary Hammer  
HR006G



Demolition Hammer  
HM002G



Demolition Hammer  
HM001G



Rotary Hammer  
HR005G



Combination Hammer  
HR001G / HR002G / HR003G / HR004G



## Accessories


Dust extractor attachment set

### Drilling / Hammering

Part No. 191N81-0



Drilling mode



Hammering mode




### Hammering

without Vacuum hose set

Part No. 199143-4

with Vacuum hose set  
Part No. 199144-2

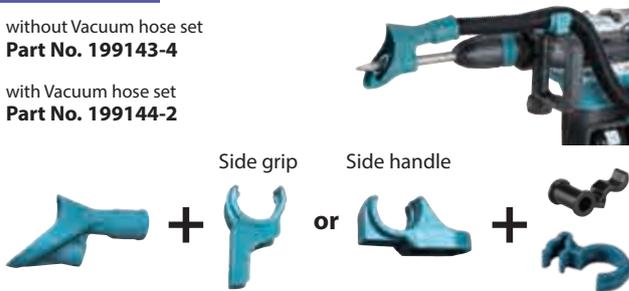

## Charging Time Reference

40Vmax Li-ion	DC40RA	DC40RC
	Fast Charging	
BL4020 2.0Ah	22min	30min
BL4025 2.5Ah	28min	38min
*BL4040 4.0Ah	45min	67min
*BL4050F 5.0Ah	50min	85min

\* Recommended battery

## Cordless Rotary Hammer

HR006G 52 mm (2-1/16") Adapted for SDS-MAX bits

- Variable Speed
- Brake
- SDS-MAX Shank
- Torque Limiter
- Constant Speed
- Soft Start
- Built-in Job Light
- Carrying Case

<b>Impact Energy Capacity</b>	EPTA-Procedure 05/2009: 21.4 J
	Concrete (w/ TCT Bit): 52 mm (2-1/16") Concrete (w/ Core Bit): 160 mm (6-5/16")
<b>Blows Per Minute (BPM)</b>	1,100 - 2,250
<b>No Load Speed (RPM)</b>	150 - 310
<b>Sound Pressure Level</b>	99 dB(A)
<b>Sound Power Level</b>	110 dB(A)
<b>Vibration Level</b>	Chiselling Function w/ Side Handle: 7.0 m/s <sup>2</sup>
	Chiselling Function w/ Side Grip: 7.0 m/s <sup>2</sup>
	Hammer Drilling into Concrete: 8.5 m/s <sup>2</sup>
<b>Dimensions (L x W x H)</b>	w/ BL4040: 610 x 140 x 337 mm (24 x 5-1/2 x 13-1/4")
<b>Net weight</b>	12.9 - 14.3 kg (28.4 - 31.5 lbs.)

**Standard Equipment**: Side Handle, Side Grip, Depth Gauge, Grease vessel

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table.

Items of standard equipment and specifications may vary by country or area.

# Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 202102