



Cordless Worklight
ML003G



40V Li-ion
max

High-intensity
LED light for
large workspaces

Luminous flux:

Max. 1,100 lm



Continuous run time*

High Low

10 / 22 hour

Dust and water resistance

IP65



*on a single full battery charge, Battery : BL4040



Compact design with a short height thanks to the retractable carrying handle



240°

Knob for free adjustment of light angle enables the light source to rotate from -30° to 210° to a desired angle.


Mode memory function for convenience in brightness setting

High/Low brightness setting is controlled by operation of a single purpose switch, which can memorize a previous brightness mode, enabling the worklight to resume illumination at the same mode as last time user turned off.

Applicable battery



- BL1815N
- BL1820B
- BL1830B
- BL1840B
- BL1850B
- BL1860B

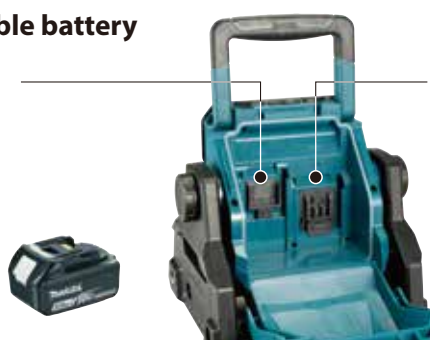

- BL4020
- BL4025
- BL4040
- BL4050F



On / Off Switch High/Low brightness setting



High



1,100 lm

Low



450 lm

Battery capacity warning function

automatically notifies about reduction in battery capacity with the decrease of Illuminance (Only one LED is on notification)

1. Full brightness, with all LEDs on.
2. Only one LED is on as the picture below. (This will continue about five to ten minutes in case of using battery.)
3. All LEDs turn off.



Dust and water resistance

IP65

For use in outdoor applications or harsh environments

Light source			
Type: LED 20pcs x 0.6W	High	Low	
Illuminance *1	500lx	200lx	
Luminous flux	1,100lm	450lm	
Continuous run time*2	10h	22h	

*1 at 1m from the light source
*2 on a single full battery charge, Battery : BL4040

Accessories

Tripod

Up to two ML003G's can be mounted.
Height : 1,300-2,000mm
Set Screw : M8
Part No.
GM00002073




Vise

Part No.
GM00001396



Anti-glare film

Part No.
GM00002312

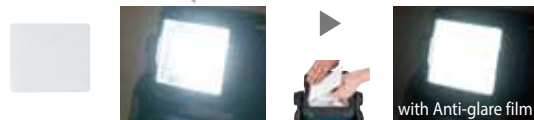

Cordless Worklight

ML003G

Run Time (hrs)	Up to: 22 (Low mode, with BL4040)
Illuminance (High / Low)	
at 1m from the light source:	500 / 200 lx
at 0.5m from the light source:	1,900 / 800 lx
Luminous Flux (High / Low)	1,100 / 450 lm
Dimensions (L x W x H)	
w/ Handle in Retracted Position:	249x298x280mm (9-3/4"x11-3/4"x11")
w/ Handle in Upright Position:	249x298x386 mm (9-3/4"x11-3/4"x15-1/4")
Net weight	3.7 - 4.7 kg (8.2 - 10.4 lbs.)

Standard Equipment : Battery & Charger Sold Separately

The weight does not include battery cartridge.
Items of standard equipment and specifications may vary by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 202105