



Cordless Earth Auger DG001G



XGT
40V **LI-ION**
max

High performance drilling with light weight body



Max Drilling Capacity

Ø200 mm

Net weight

7.8 kg

with BL4040



ADT **BL** **XPT**
MOTOR

Work amount	
depth 600mm / BL4040 / on full battery charge / low speed mode	
ø150mm about 100 holes	ø200mm about 65 holes



Reversing switch



enables to extract, in reverse rotation mode, an auger bit jammed in soil with high resistance like clay soil.



Torque limiter


The torque limiter will actuate when a certain torque level is reached at the low speed setting. The motor will disengage from the output shaft. When this happens, the drill bit will stop turning.



ADT

Automatic torque Drive Technology

automatically changes the drilling speed according to load conditions for an optimum operation

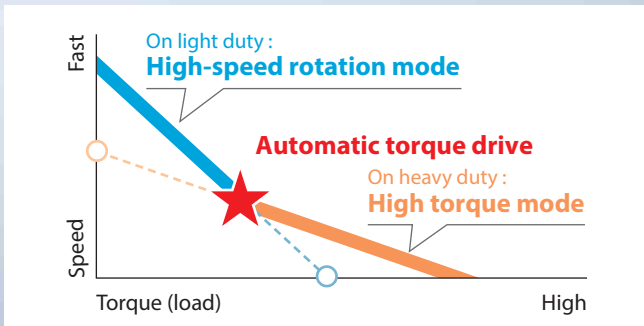

For larger holes



Power similar to 36cc engine product



Auxiliary handle

Reaction receiver

Reversing switch

Makita

40V

Mechanical 2-speed

Twin LED job light

Adapter

Earth auger drill bit
Length: 800mm

Ø100 mm

Ø150 mm


Ø200 mm

BL MOTOR
High power
Brushless motor

XPT
eXtreme Protection
Technology



High Power
Durability
Digital Communication

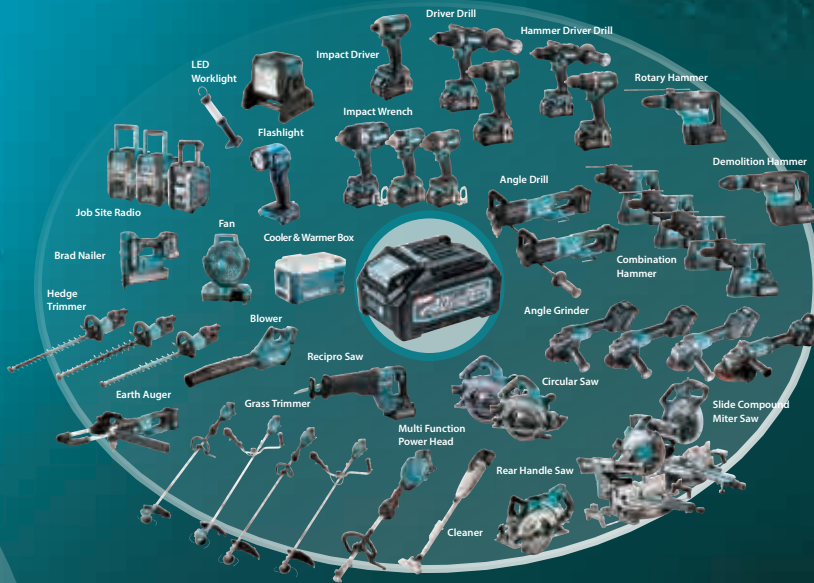

Portable Power Pack

PDC01

Powered by up to four 18V LXT batteries



PDC1200

Powered by 36V-40Vmax built-in battery



Adapter set (40Vmax)

Part No. 191N62-4




Adapter between Battery box of Portable power pack and Product on 40Vmax XGT platform

Accessories

Earth auger drill bit

Length: 800mm



Blade for earth auger bit

Changing blade for Earth auger drill bit



Extension bar

Part No. E-07325



Pin for earth auger drill

Part No. E-07331



Handle set

Part No. 191P11-3

includes a bar which receives reaction force and an auxiliary handle, and helps the user drill holes in the ground easier.



Charging Time

Battery Model	Fast Charging	
	DC40RA	DC40RC
BL4020 2.0Ah	22 min	30 min
*1BL4025 2.5Ah	28 min	38 min
*1BL4040 4.0Ah	45 min	67 min
*1BL4050F 5.0Ah	50 min	85 min

*1 Recommended battery

Cordless Earth Auger

DG001G

- Variable Speed
- Brake
- Reversing
- Mechanical 2-Speed
- Torque Limiter
- Soft Start
- Built-in Job Light
- Carrying Case

Capacity	Sandy Soil: 200 mm Clay Soil: 150 mm
No Load Speed (RPM)	High / Low: 0 - 1,500 / 0 - 400
Max Fastening Torque	High: 55 N·m (487 in.lbs.) Low: 136 N·m (1,210 in.lbs.)
Vibration Level	2.5 m/s ² or less
Sound Pressure Level	84 dB(A)
Sound Power Level	95 dB(A)
Dimensions (L x W x H)	w/ BL4050F: 863 x 605 x 199 mm (34 x 23-3/4 x 7-7/8") w/ BL4040: 842 x 605 x 199 mm (33-1/4 x 23-3/4 x 7-7/8") w/ BL4020 / BL4025: 836 x 605 x 199 mm (33 x 23-3/4 x 7-7/8")
Net weight	7.2 - 8.1 kg (15.9 - 17.9 lbs.)

Standard Equipment: Chuck Key, Hex Wrench, Adapter, Battery, Charger

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area.