



Cordless Cooler & Warmer Box CW001G



-18 ^{Cool} °C ~ **60** ^{Warm} °C [**0**°F ~ **140**°F]

Keep cold, Keep warm



Large capacity
20 L

IPX4

Compatible with 4 power sources

1. 40Vmax XGT battery

(two in parallel or one)



2. 18V LXT battery

(two in parallel or one)



Also can be powered by the combination of one XGT battery and one LXT battery.



3. AC
(through AC adapter)



4. 12V/24V DC
(cigar socket)



-18^{Cool} °C [0°F]



Work amount on full battery charge

-18°C [0°F] about 10 h	5°C [40°F] about 28 h	60°C [140°F] about 8.5 h
--------------------------------------------	-------------------------------------------	----------------------------------------------

With two BL4050F
batteries




Powered by 40Vmax XGT Li-Ion battery



Freeze the ice pack

-10^{Cool} °C
[15°F]

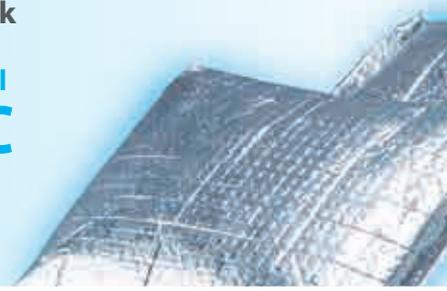

Cool the drink

5^{Cool} °C
[40°F]



Warm the caulk tube

30^{Warm} °C
[85°F]



Caulk tubes to be warmed must be brand new and unopened. Also caulk tubes must be stored in the box within the storage temperature range recommended by the manufacturer of caulk tubes.*

*Do not store opened caulk tubes with foods because they produce volatile gas.



More detailed inside temperature settings

	Cool storage							Hot storage						
°C	-18	-15	-10	-5	0	5	10	30	35	40	45	50	55	60
°F	0	5	15	25	30	40	50	85	95	105	115	120	130	140

Indication lamps

- Cooling lamp or Warming lamp indicates whether the machine is cooling or warming.
- Power lamp turns on when the machine is powered by external source (from cigar socket or AC socket through AC adapter).

Cooling lamp



Warming lamp



Carrying handle



Grips for carrying by hands



Bottle opener



Large 100mm casters

20L (5.3gal) capacity



IPX4-rated water resistance

USB output port





High Power
Durability
Digital Communication

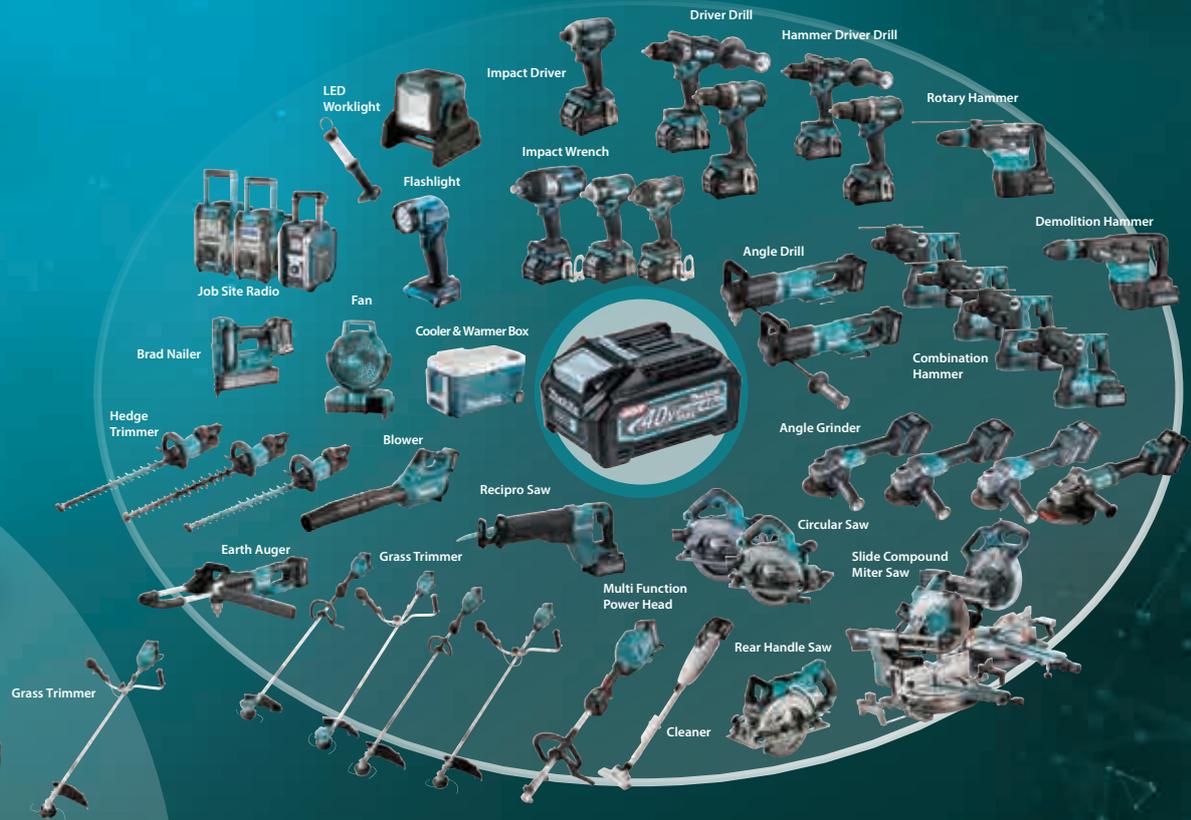

Accessories

AC adapter



Connect Electricity

Cordless Fan



Job Site Radio



LED Flashlight /
Cordless Worklight



Cordless
Coffee Maker



Adapter
for USB



Charging Time

40Vmax Li-ion	Fast Charging		18V LITHIUM-ION	Fast Charging		
	DC40RA	DC40RC		DC18RC	DC18RD	DC18SD
BL4020 2.0Ah	22 min	30 min	BL1815N 1.5Ah	15 min	30 min	
BL4025 2.5Ah	28 min	38 min	BL1820B 2.0Ah	24 min	45 min	
BL4040 4.0Ah	45 min	67 min	BL1830B 3.0Ah	22 min	60 min	
BL4050F 5.0Ah	50 min	85 min	BL1840B 4.0Ah	36 min	90 min	
			BL1850B 5.0Ah	45 min	110 min	
			BL1860B 6.0Ah	55 min	130 min	

Cordless Cooler & Warmer Box

CW001G	
Capacity	20 L (5.3 gal)
Cooling System	Compressor type
Cooling Capacity	-18 / -15 / -10 / -5 / 0 / 5 / 10°C (0 / 5 / 15 / 25 / 30 / 40 / 50°F)
Warming System	Heater
Warming Capacity	30 / 35 / 40 / 45 / 50 / 55 / 60°C (85 / 95 / 105 / 115 / 120 / 130 / 140°F)
Run Time	w/ BL4050F X2, -18°C / 5°C / 60°C: 10h / 28h / 8.5h
Cord Length	AC Adapter / Cigar Socket Cable: 2 / 2.5 m (6.5 / 8.2 ft)
Dimensions (L x W x H)	663x341x372 mm (26-1/8x13-3/8x14-5/8")
Net weight	13.5 - 16.1 kg (29.8 - 35.5 lbs.)
Standard Equipment : Shoulder Belt, AC Adaptor (country-specific), Cigar Socket Cable	

Items of standard equipment and specifications may vary by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 2021/09