



Cordless Pole Saw series

UA001G / UA002G 250mm (10")

UA003G / UA004G 300mm (12")



XGT 40V L^{ION} max



photo: UA002G

High power X Long reach || High efficiency

250mm (10")


UA001G **Fixed length**

UA002G **Telescopic**

300mm (12")

UA003G **Fixed length**

UA004G **Telescopic**

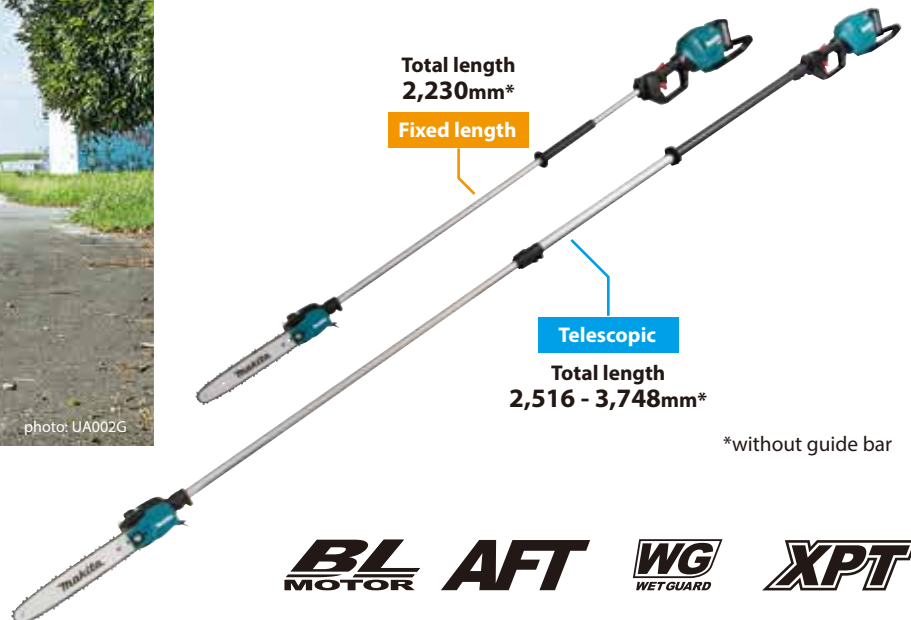

Total length
2,230mm*

Fixed length

Telescopic


Total length
2,516 - 3,748mm*

*without guide bar

No load chain speed

20.0 m/s



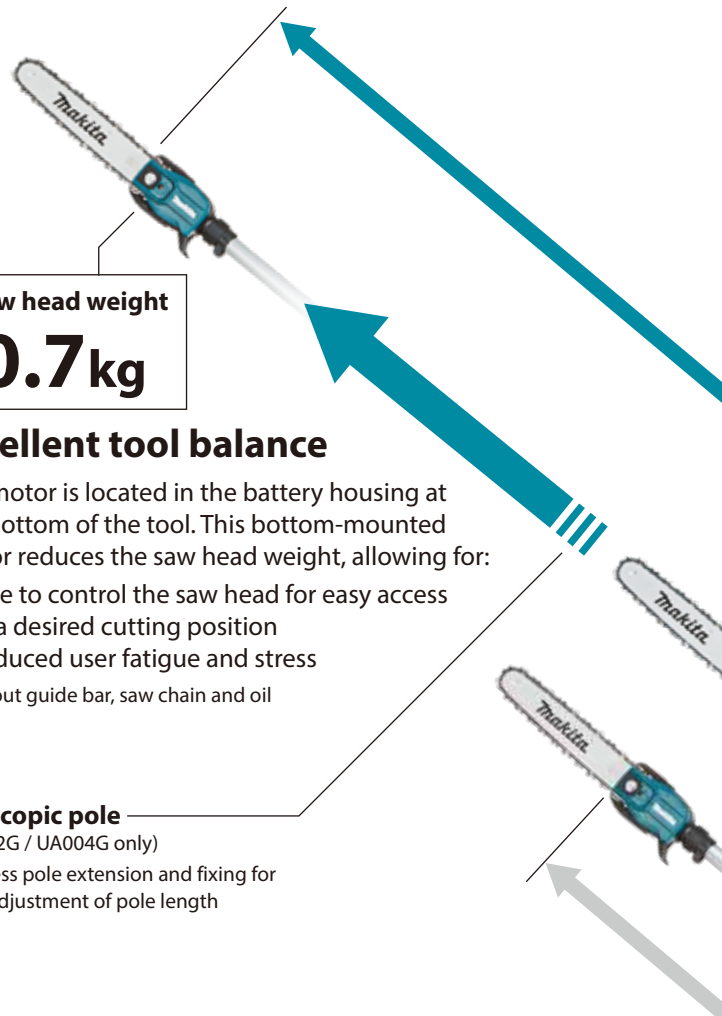

*Saw head weight
0.7kg

Excellent tool balance

The motor is located in the battery housing at the bottom of the tool. This bottom-mounted motor reduces the saw head weight, allowing for:

- Ease to control the saw head for easy access to a desired cutting position
- Reduced user fatigue and stress

*without guide bar, saw chain and oil

Telescopic pole

(UA002G / UA004G only)

Tool-less pole extension and fixing for easy adjustment of pole length



High operating efficiency

High power BL motor delivers the same or higher operation efficiency than 35mL class engine models.



Active Feedback sensing Technology

Torque limiter turns the motor off if the tool is suddenly forced to lock

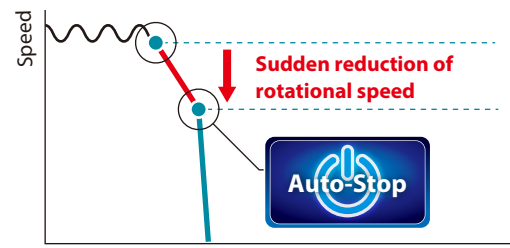


photo: UA002G

higher operation efficiency than 35 mL class engine models



Retractable oil tank cap knob decreases the chance that the saw head will be snagged in branches.

Slim saw head

The same slim design as engine pole saws provides easy maneuverability into branches.

Saw head width
87 mm

Chain oil tank with high transparency allows to easily check the amount of remaining oil.



Integrated branch hook convenient for removing cut branches from trees



Anti-fall captive nut

Maximum total length
3,748 mm
Shortest total length
2,516 mm

Telescopic

XPT / **WG** / **IPX4**
WET GUARD



High water-resistance allows to operate the machine even if it is wet with water.

Total length
2,230 mm

Fixed length

250mm (10")


UA001G **Fixed length**

UA002G **Telescopic**

300mm (12")

UA003G **Fixed length**

UA004G **Telescopic**



Battery guard also can be used as an auxiliary grip.



Accessories


Guide bar / Saw chain / Guide bar cover

Cutter type: CC: Chamfer chisel

Guide Bar



Saw Chain



Bar Cover



Drive sprocket



Guide Bar				Saw Chain				Bar Cover		Drive sprocket		
Bar length	Motor Mount	Type	Part No.	No. of drive links	Gauge	Pitch	Type OREGON	Cutter type	Part No.	Part No.	Type	Part No.
25cm/10"	A041	Sprocket nose bar	191G14-3	40	1.1mm/.043"	3/8"LP	90PX	CC	191H00-0	458501-6	Sprocket 3/8"LP	226992-7
30cm/12"			191G15-1	46					191H01-8	419288-5		
25cm/10"			191G22-4	40	1.3mm/.050"		91PX		191H08-4	458501-6		
30cm/12"			191G23-2	46					191H10-7	419288-5		

Band assembly set Part No. 191K37-5

The weight of the tool can be distributed on shoulders for reduced operator fatigue.



Portable Power Pack

PDC1200

Powered by 36V-40Vmax built-in battery



PDC01

Powered by up to four 18V LXT batteries



Adapter set

Part No. 191N62-4



Charging Time

40Vmax Li-ion	Fast Charging	
	DC40RA	DC40RC
BL4020 2.0Ah	22 min	30 min
BL4025 2.5Ah	28 min	38 min
*1BL4040 4.0Ah	45 min	67 min
*1BL4050F 5.0Ah	50 min	85 min

*1 Recommended battery

Cordless Pole Saw

UA001G 250 mm (10")

UA003G 300 mm (12")

Cordless Telescopic Pole Saw

UA002G 250 mm (10")

UA004G 300 mm (12")

Variable Speed

Brake

Soft Start

Standard Equipment :

Saw Chain, Guide Bar, Blade Cover, Wrench, Band Assembly, Hex Wrench, Battery, Charger

Guide Bar Length

UA001G: 250 mm (10")
UA003G: 300 mm (12")

Saw chain

Gauge: 1.1 / 1.3 mm (0.043 / 0.050")
Pitch: 3/8"

Chain Speed

0 - 20.0 m/s (0 - 1,200 m/min)
(0 - 3,940 FPM)

Oil Tank Capacity

Dimensions (L x W x H)
without guide bar and Battery or with Battery BL4040

with guide bar, Saw chain and Battery BL40450F

Net weight

UA001G / UA003G

2,230 x 156 x 187 mm
(88 x 6-1/8 x 7-3/8")
UA001G: 2,470 x 156 x 192 mm
(97-1/4 x 6-1/8 x 7-9/16")
UA003G: 2,526 x 156 x 192 mm
(99-1/2 x 6-1/8 x 7-9/16")

UA001G: 6.0 - 7.2 kg (13.2 - 15.9 lbs.)

UA003G: 6.1 - 7.4 kg (13.4 - 16.3 lbs.)

UA002G / UA004G

2,516 - 3,748 x 156 x 187 mm
(99 - 147-1/2 x 6-1/8 x 7-3/8")
UA002G: 2,765 - 3,997 x 156 x 192 mm
(109 - 157-1/2 x 6-1/8 x 7-9/16")
UA004G: 2,812 - 4,044 x 156 x 192 mm
(110-1/2 - 159 x 6-1/8 x 7-9/16")

UA002G: 7.7 - 8.9 kg (17.0 - 19.6 lbs.)

UA004G: 7.8 - 9.1 kg (17.2 - 20.1 lbs.)

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 202112