



# Cordless Pin Nailer PT001G



**XGT**  
**40V** LI-ION  
**max**

Firing quickness

about **20%**  
**UP**



Work volume  
on a single full battery charge

about  
**6,000** shots

Battery: BL4025



# Quick firing thanks to BL motor



**BL**  
**MOTOR**

Use of BL motor and redesigned driving spring shortens the time required to compress and release the spring, providing drastically quicker firing.


Firing quickness

about **20%**  
**UP**

PT001G	120
Predecessor Model 18V	100

slow                      firing quickness                      fast

## Beautiful finish

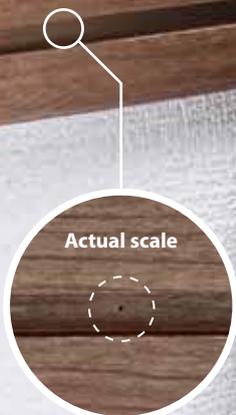


## Improved Driver durability

achieved by redesigning the shape of the driver tip and reducing thin places.



## Low recoil mechanism

- enables easier nailing of long pins without pushing down the pin nailer firmly.
- achieves high-quality finish nailing.

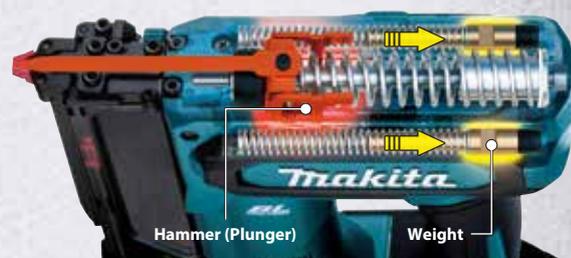

Work volume  
on a single full battery charge  
about **6,000** shots  
Battery: BL4025

Pin nails  
Diameter **Ø0.6 mm**

---

Length  
**15/18/25/30/35 mm**

## Compact & Lightweight



Net weight  
**2.4 kg**  
Battery: BL4025

## Contact arm mechanism

enables "continuous nailing" and "drag nailing".  
[If the nose tip isn't pressed to a workpiece, the trigger cannot be pulled.]





Nose tip (with Nose adapter)

thickness **4 mm**



**Fires both vertically and horizontally**

Nails can be fired in the groove of baseboard.



Ergonomically designed grip



Nose tip designed to provide better visibility

Single LED job light



with pre-glow and after-glow functions

Driving depth adjustment by dial




- Able to drive up to 35mm pin nails
- Anti-dry fire mechanism

**XPT**



**eXtreme Protection Technology**

**High Power**  
**Durability**  
**Digital**  
**Communication**

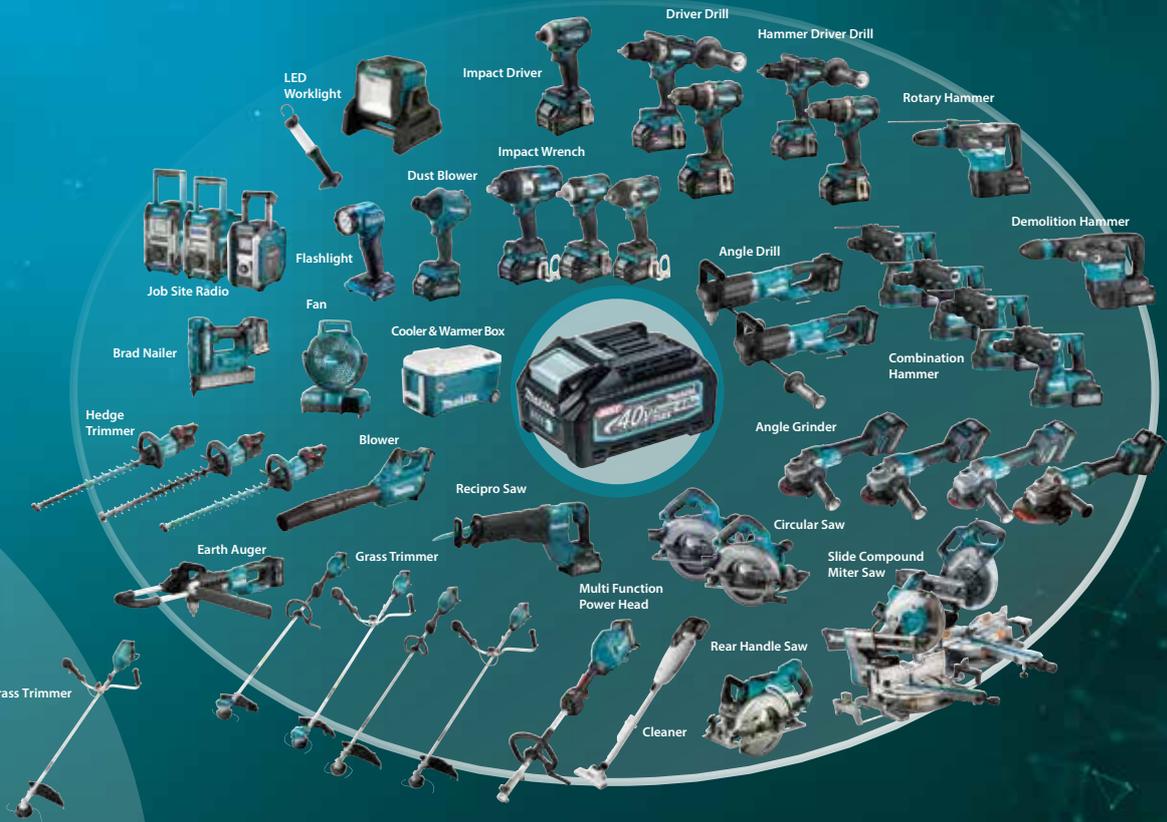

**■ Cordless Pin Nailer Series**

**DPT353**



**PT354D**



**■ Accessories**

**Nose adapter**

Part No. 422872-7

Nose adapter for flat nailing



**■ Charging Time**

40V L <sup>ION</sup> max	Fast Charging	
	DC40RA	DC40RC
*1 BL4020 2.0Ah	22 min	30 min
*1 BL4025 2.5Ah	28 min	38 min
BL4040 4.0Ah	45 min	67 min
BL4050F 5.0Ah	50 min	85 min

\*1 Recommended battery

**Cordless Pin Nailer**

**PT001G**

Depth Adjustment	Capacity	Length: 15, 18, 25, 30, 35 mm (5/8, 11/16, 1, 1-3/16, 1-3/8") Dia.: 0.6 mm (1/32") Gauge: 23 Ga
Auto Firing Stop	Magazine Capacity	120
Built-in Job Light	Approx. work volume on a full battery charge	6,000
Carrying Case	Vibration Level	2.5 m/s <sup>2</sup> or less
	Sound Pressure Level	79 dB(A)
	Dimensions (L x W x H)	w/ BL4020 / BL4025: 265 x 86 x 226 mm (10-3/8 x 3-3/8 x 8-7/8")
	Net weight	2.4 - 3.0 kg (5.3 - 6.6 lbs.)

Standard Equipment : Nose Adapter, Safety Goggles, Belt Clip, Hex Wrench, Battery, Charger

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table.  
Items of standard equipment and specifications may vary by country or area.

**Makita Corporation**

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 202201