



Cordless Mixer UT001G / UT002G 240 mm (9-1/2")



40V LI-ION max



UT001G

Screw-in type shaft holder
Mixing blade, Shaft, Shaft holder
(country-specific)



UT002G

ø13mm drill chuck



Max blade diameter

ø240 mm





photo: UT001G

Heavy duty operation such as mixing concrete



photo: UT001G

BL
MOTOR

High operating efficiency



XPT

eXtreme Protection Technology




Switch cover is minimizes the chance that switch trigger or lock-on button might be stuck by adhered and hardened material.

Lock-off

Lock-on

Variable speed control by trigger



During mixing, blade speed can be adjusted by operating trigger in order to reduce the chance that material might spatter out of mixing bucket.




Mixing speed selectable according to a variety of material



High speed
0 - **920**
min⁻¹

for fast mixing of medium viscous material such as mortar or paint

Possible to adjust blade speed even finer according to material.



+



Mechanical 2-speed gearing

Variable speed control by dial

Low speed
0 - **500**
min⁻¹

for mixing high viscous material such as concrete



Battery cover is minimizes the chance that spattered material might adhere to battery.

Battery cover

Compatible battery
BL4080F, BL4050F
BL4040, BL4025
BL4020



Double D-handle with ergonomic soft grip

Allows user to operate in stable work posture with less fatigue



Soft start

Slow blade speed at the start of mixing provides:
• less reaction force to operator at start-up.
• minimized spatter of material.

Max blade diameter



photo:
UT001G with Mixing blade

ø240 mm

Shank holding mechanism


UT001G:
Screw-in type shaft holder
M12/ M14 (Country-specific)



UT002G:
Drill chuck
Chuck capacity
2 - 13 mm (1/16 - 1/2")



High Power
Durability
Digital
Communication

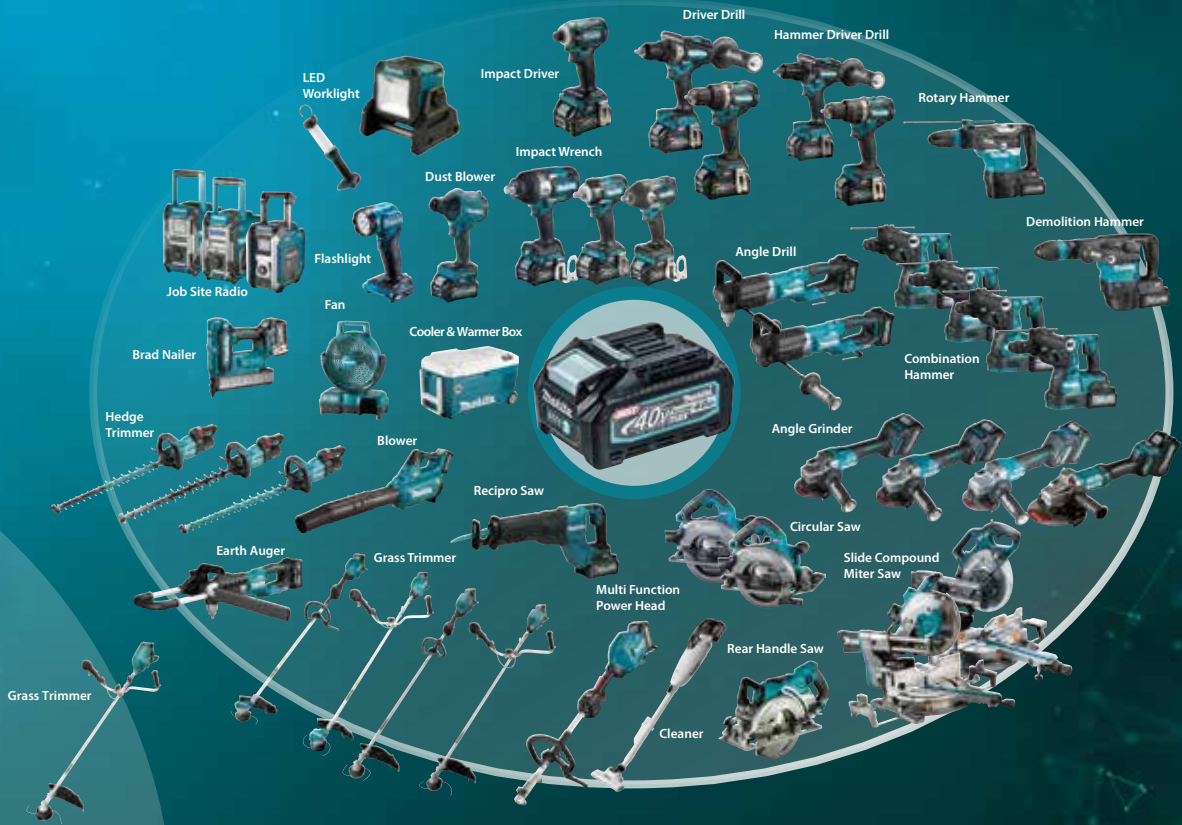

Accessories

Shaft	Stainless steel (M12, L: 584mm, D: 12mm)									
Part No.	168439-5					A-43773				
Mixing Blade dia (mm)	130	150	165	135	175	175	183	190	201	220
Shape										
Part No.	A-43670	A-43686	A-43692	A-43723	A-43701	312D12-8	A-43739	A-33065	A-33071	A-43717
Bolt Size (Bolt sold separate)	M8 x 18	*M8 x 25	M8 x 18	W5/16 x 16	W5/16 x 16	M8 x 16	W5/16 x 16	W5/16 x 16	W5/16 x 16	M8 x 16
Part No.	265220-5	251686-5	265220-5	265475-2	265475-2	265440-1	265475-2	265475-2	265475-2	265440-1

*with Bolt

Charging Time

	Fast Charging	
	DC40RA	DC40RC
BL4020 2.0Ah	22 min	30 min
BL4025 2.5Ah	28 min	38 min
*1 BL4040 4.0Ah	45 min	67 min
*1 BL4050F 5.0Ah	50 min	85 min
*1 BL4080F 8.0Ah	76 min	170 min

*1 Recommended battery

Cordless Mixer UT001G / UT002G 240 mm (9-1/2")

	UT001G	UT002G
Variable Speed		
Mechanical 2-Speed		
Constant Speed		
Soft Start		
Blade diameter	240 mm (9-1/2")	240 mm (9-1/2")
Chuck capacity	-	2 - 13 mm (1/16 - 1/2")
No Load Speed (RPM)	High / Low: 0 - 920 / 0 - 500	High / Low: 0 - 920 / 0 - 500
Sound Pressure Level	81 dB(A)	81 dB(A)
Sound power level	92 dB(A)	92 dB(A)
Vibration level (m/s ²)	Operation w/o load: 2.5 m/s ² or less	Operation w/o load: 2.5 m/s ² or less
Dimensions (L x W x H)	*414 x 458 x 235 mm (16-1/4 x 18 x 9-1/4")	404 x 458 x 235 mm (15-7/8 x 18 x 9-1/4")
Net weight	5.7 - 7.0 kg (12.6 - 15.4 lbs.)	5.8 - 7.2 kg (12.8 - 15.9 lbs.)

*w/o Mixing blade and Shaft

Standard Equipment :

UT001G: Mixing blade, Shaft (country-specific), Shaft holder (country-specific), Wrenches (country-specific), Battery, Charger
 UT002G: Chuck key, Hex wrench, Mixing blade, Shaft (country-specific), Shaft holder (country-specific), Wrenches (country-specific), Battery, Charger

The weight may differ depending on the attachment(s), including the battery cartridge.
 The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table.
 Items of standard equipment and specifications may vary by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 202302