



Cordless Job Site Speaker MR014G 14.4V-40Vmax / AC



XGT
40V LITHIUM-ION
max

18V
LITHIUM-ION

High-quality sound with powerful deep bass



**Built-in microphone
amplifier**



AUX-IN port



Bluetooth®



Max volume*

99 dB(A)

(Bluetooth, AUX IN)



Qualcomm®
aptX™ HD



Qualcomm®
aptX™



*Sound Pressure Level data measured at 1m distance with iPhone 14 Pro (max volume)

High-quality sound

Powerful deep bass and high sound quality have been achieved due to improvements such as enlarged component speakers, etc.

Woofer ø140.8 mm x1	Tweeter ø40 mm x1	Passive radiator ø100.7 mm x2	Supported codecs aptX, aptX HD, AAC, SBC
-------------------------------	-----------------------------	---	--

Sound pressure level
1.8 times higher
Compared with our 18V model

Built-in microphone amplifier

Equipped with a dedicated microphone jack for use as a microphone amplifier speaker




Light function

The lighting mode of the LED decorative line (LED on the front) can be switched.

1. Off
2. Always solid on
3. The LED decorative line blinks to the music.



Connectable to multiple units

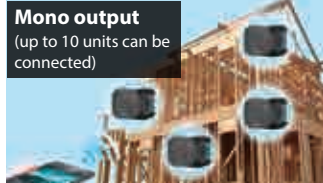

Smartphone stand

A smartphone can be placed vertically by fixing the handle at an angle.



Bluetooth transmission power: Class 1

Transmission distance
Guaranteed | Communicable
30m | **100m**

USB output terminal for charging smartphone etc.



Enlarged color LCD screen

- Illuminated control buttons
- Increased character size makes it easier to read display information.

Equalizer

(FLAT, JAZZ, ROCK, CLASSIC, POP, NEWS, My equalizer)




Control buttons

(allows playback, stop and song selection)



Power source

Li-ion battery (slide type)

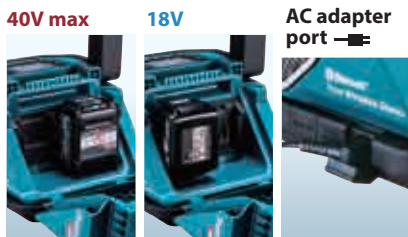

IP65 -rated

dust and shower-proof construction with Battery storage cover and Rubber terminal covers closed

Continuous run time (approx): hour

With the LED decorative line on the front Off / With the LED decorative line on the front Solid On

40V max	Bluetooth		18V		
	AUX IN	AUX IN	Bluetooth	AUX IN	
BL4020 (2.0Ah)	23/19	24/19	BL1815N (1.5Ah)	10/8.0	11/8.5
BL4025 (2.5Ah)	30/24	31/25	BL1820B (2.0Ah)	14/11	15/11
BL4040 (4.0Ah)	47/39	49/40	BL1830B (3.0Ah)	19/15	20/16
BL4040F (4.0Ah)	47/39	49/40	BL1840B (4.0Ah)	28/22	29/22
			BL1850B (5.0Ah)	36/28	37/29
			BL1860B (6.0Ah)	43/34	45/35

Charging Time

40V ^{max} L ^{ION}	Fast Charging DC40RA		18V ^{max} L ^{ITHIUM-ION}	Fast Charging DC18RC	
	DC40RA	DC40RC		DC18RC	DC18SD
BL4020 2.0Ah	22 min	30 min	BL1815N 1.5Ah	15 min	30 min
BL4025 2.5Ah	28 min	38 min	BL1820B 2.0Ah	24 min	45 min
BL4040 4.0Ah	45 min	67 min	BL1830B 3.0Ah	22 min	60 min
BL4040F 4.0Ah	45 min	67 min	BL1840B 4.0Ah	36 min	90 min
			BL1850B 5.0Ah	45 min	110 min
			BL1860B 6.0Ah	55 min	130 min

Cordless Job Site Speaker

MR014G 14.4V-40Vmax / AC

Speaker size	Woofer: Dia. 140.8 mm / Tweeter: Dia. 40 mm Passive radiator: Dia. 100.7 mm x2
Max volume	Bluetooth: 99 dB(A) / AUX IN: 99 dB(A)
Input port	AUX IN: 3.5 mm (1/8") / Mic input port: 6.3 mm (1/4")
USB output port	Type A for 5V / 2.4A
Bluetooth	Version: 5.1 Profile: A2DP / SCMS-T / AVRCP Supported code: aptX, aptX HD, AAC, SBC Max transmission range: 30 m Max transmission range (Possible): 100 m Transmission power: Class 1
Dimensions (L x W x H)	w/ Handle in retracted position: 243 x 236 x 205 mm (9-9/16 x 9-1/4 x 8-1/8") w/ Handle in upright position: 243 x 236 x 313 mm (9-9/16 x 9-1/4 x 12-3/8")
Net weight (Tool only)	3.8 kg (8.4 lbs.)

Standard Equipment : AC adaptor

Not covered by EPTA-Procedure

Items of standard equipment and specifications may vary by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

