



# Snow Blower Attachment SN400MP



**For clearing snow around premises**  
Reduced snow clearing fatigue with a cordless power head

Max snow  
throwing distance \*1  
**12m**  
with UX01G (High mode)

\*1 When clearing snow with an approx density of 150g/L, an accumulation of 150mm, and snow throwing direction 0° to the front. (The distance varies depending on snow conditions, working speed, etc.)

Snow Blower  
Attachment  
SN400MP

Easy change

photo: UX01G

Compatible models: UX01G, DUX60, DUX18



# For clearing snow around facilities and homes



photo: UX01G


## Snow Blower Attachment SN400MP

Standard equipment:  
Hex wrench, Cap



### Snow throwing direction can be changed

The direction of snow throwing can be changed (up to 30° to the left or right) by adjusting the angle of the louvers with the louver angle adjustment lever.

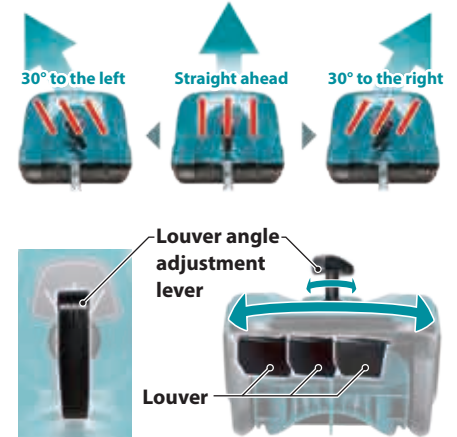

Work area (approx)  
on full battery charge \*2

# 48m<sup>2</sup>

with UX01G (High mode) /  
BL4040 battery

\*2 When clearing snow with an approx density of 150g/L and an accumulation of 150mm (The distance varies depending on snow conditions, working speed, etc.)

### Clear snow according to its condition

#### Fresh snow

Powdery and easily collapsible snow  
[Density: 50-150g/L]

#### Compacted snow

Snow that has become slightly hardened a few days after falling as fresh snow  
[Density: 150-300g/L]



### Compatible models

#### Cordless Multi Function Power Head

##### UX01G

40V max



##### DUX60

18V x2



##### DUX18

18V



Multi function power head	No load speed (min <sup>-1</sup> )			Snow throwing distance (m) *2			Continuous use (min.) *2				Work area (m <sup>2</sup> ) *2			
	High	Med	Low	High	Med	Low	Battery	High	Med	Low	Battery	High	Med	Low
UX01G	0-1,860	0-1,560	0-1,080	12	7	5	BL4040	7.1	12	25	BL4040	48	63	115
DUX60				9	7	5	BL1860B x2	13	19	36	BL1860B x2	85	111	214
DUX18	0-1,860	-	0-1,290	7	-	4	BL1860B	10	-	15	BL1860B	44	-	58

Multi function power head	Shovel diameter	Snow clearing width	Max snow clearing height *3	Snow throwing angle adjustment	Vibration front handle (m/s <sup>2</sup> ) *4	Vibration rear handle (m/s <sup>2</sup> ) *4	Sound power level LWA (dB(A)) *4	Sound pressure level LPA (dB(A)) *4	Dimensions (L x W x H)	Net weight
UX01G	150 mm	300 mm	300 mm	30° to the left and right	1.5	2.2	91	81	1,756 x 384 x 343 mm (69 x 15-1/8 x 13-1/2")	9.1 - 10.3 kg (20 - 23 lbs.)
DUX60					1.8	1.8	91	77	1,766 x 384 x 348 mm (69-1/2 x 15-1/8 x 13-3/4")	8.8 - 9.5 kg (19 - 21 lbs.)
DUX18					2.1	2.0	90	78	1,737 x 384 x 333 mm (68-1/2 x 15-1/8 x 13-1/8")	7.8 - 8.1 kg (17 - 18 lbs.)
Attachment only								835 x 384 x 333 mm (32-7/8 x 15-1/8 x 13-1/8")	5.0 kg (11.0 lbs.)	

\*2 When clearing snow with an approx density of 150g/L and an accumulation of 150mm (The value varies depending on snow conditions, working speed, etc.)

\*3 When clearing powdery and easily collapsible snow \*4 According to ISO8437-4

Items of standard equipment and specifications may vary by country or area.

## Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan



PRINTED IN JAPAN 202408

www.makita.com