



Cordless Circular Saw HS013G 415 mm (16-5/16")



40V^{LI-ION} max

Unveiling the world's largest 415 mm cordless circular saw*¹
Cuts through thick materials in a single stroke with high power similar to corded models

*¹ As of August 2024



Guide rule: optional accessory

Work amount

on a single full battery charge

Cut Melapi (Thickness: 150mm /
Width: 300mm / Bevel angle: 0° /
with BL4050F)

75 cuts




Comfortable cutting of thick materials with the high power similar to corded models



Max cutting capacity
158 mm

BL MOTOR + **XGT 40V^{Li-ion} max**

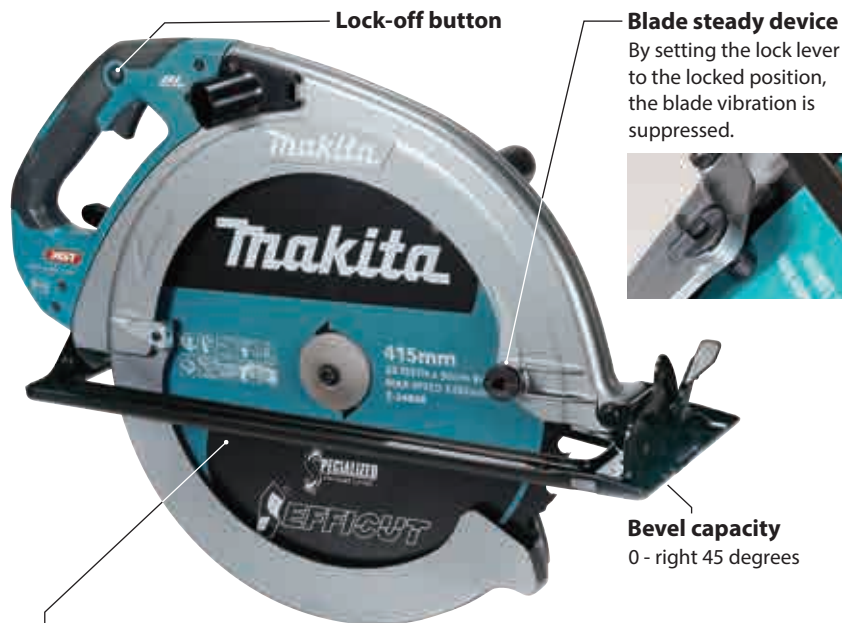

Blade steady device
By setting the lock lever to the locked position, the blade vibration is suppressed.



Bevel capacity
0 - right 45 degrees

Blade diameter
415 mm

Soft start
minimizes start-up shock, and makes the tool start smoothly.


Lightweight design and enhanced maneuverability

The motor housing material has been changed from aluminum to resin, resulting in a weight reduction of 1.5kg compared with our AC model when a BL4050F battery is installed.

Lightweight with BL4040
11.0 kg

Compact body

With the adoption of a BL motor, the width has been reduced by 65mm compared with our AC model, enhancing stability and maneuverability during blade changes.

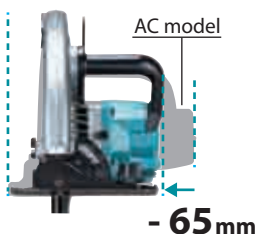

AC model

- 65mm

AWS Auto-start Wireless System



The wireless activation function enables clean and comfortable operation. By connecting the tool to a vacuum cleaner, you can run the cleaner automatically along with the switch operation of the tool. Wireless unit is compatible with all supported tools



XPT eXtreme Protection Technology

Enhanced Dust and Drip-proof Performance ensure reliable operation even under bad weather



Accessories

TCT saw blade for circular saw



415x35T
Part No. E-24832
E-24848
E-24854



Guide rule



Protect stand

(Standard equipment)
The resin stand allows for storage without damaging the tool.



Stabilizing the stand by pressing down the recessed portion with a foot allows for easy removal of the tool from storage.



The tool can be temporarily placed at an angle for easy access to the tool without bending over.



Charging Time

	Fast Charging	
	DC40RA	DC40RC
BL4040 4.0Ah	45 min	67 min
*1 BL4040F 4.0Ah	45 min	67 min
*1 BL4050F 5.0Ah	50 min	85 min
*1 BL4080F 8.0Ah	76 min	170 min

*1 Recommended battery

Cordless Circular Saw

HS013G 415 mm (16-5/16")

Soft Start	No load speed Saw blade	2,100 min ⁻¹ Type: TCT saw blade / 35T, Diameter: 415 mm (16-5/16")
Brake	Max cutting capacity Vibration level (EN62841-2-5)	0°: 158 mm (6-1/4"), 45°: 106 mm (4-3/16") Cutting wood: 2.5 m/s ² or less
Anti-restart function	Vibration K Factor (EN62841-2-5) Sound pressure level (EN62841-2-5)	Cutting wood: 1.5 m/s ² 98 dB(A)
Dust Collection	Sound power level (EN62841-2-5) Noise K factor (EN62841-2-5)	106 dB(A) 3 dB(A)
	Dimensions (L x W x H) Net weight Net weight (Battery)	606 x 233 x 476 mm (23-7/8 x 9-1/8 x 18-3/4") 11.0 - 12.0 kg (24.3 - 26.5 lbs.) BL4040 - BL4080F

Standard Equipment : TCT saw blade, Hex wrench, Joint, Protect stand, Battery, Charger

The weight may differ depending on the attachment(s), including the battery cartridge.
Items of standard equipment and specifications may vary by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

