









# With the lightweight head section, the tool ensures high work efficiency and easy pruning of high branches.



## Head angle adjustment

- The angle of the tool head is adjustable in 9 stages between 60° upwards and 60° downwards.
- The angle adjustment can be locked/unlocked with one touch.





**High Power Brushless Motor** 

### **Automatic chain lubrication**






# **Tool-less chain** adjustment



adjustment by simply loosening and retightening the lever

# Slim tool head



The slim shape of the tool head allows for easy insertion between

### **Branch hook**




Hook for pulling and dropping branches that have been caught

Lock-off buttons on both left and right sides



Battery guard

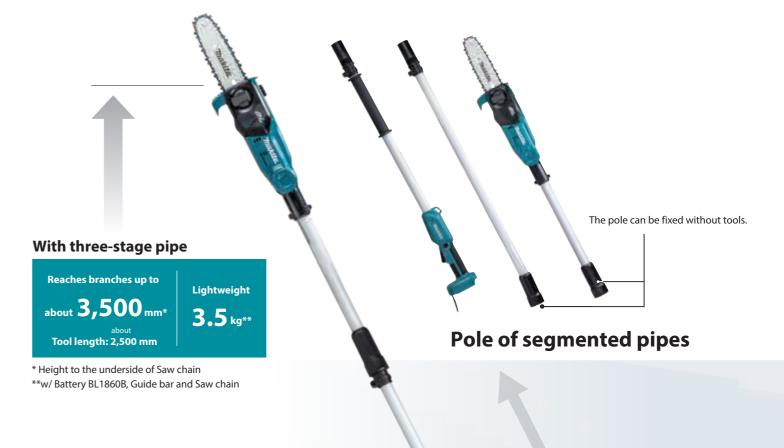



either 1,600 mm or 2,500 mm.

Pole of segmented pipes that allows the total length of the tool to be

# With two-stage pipe

Reaches branches up to about **2,500** mm\* about
Tool length: 1,300 mm

Lightweight 2.9 kg\*\*

\* Height to the underside of Saw chain

\*\*w/ Battery BL1860B, Guide bar and Saw chain


# **eXtreme Protection Technology**

Work volume on a single full battery charge

About 600 saw chain: 801AL Battery: BL1860B















### Accessories

Guide bar 8 set		- Deskits		Saw chain 8 set					Guide bar case 210	Sprocket 7 set		
Bar length	Motor Mount	Туре	Part No.	No. of drive links	gauge	pitch	Type OREGON	Cutter type	Part No.	Part No.	Туре	Part No.
20 cm/8"	A041	Sprocket nose bar	1914S3-3	38	1.1 mm / .043"	.325"LP	80TXL	MC	1914S1-7	413G28-5	Sprocket .325"LP	1911W5-9



Chain edger set

Part No. 1914A1-1

File size: 4 mm



### Oil vessel set

Part No. 199897-3

Chain oil 100 mL



# Charging Time

18V Larrium pon	DC18RC	DC18SD
<b>BL1815N</b> 1.5Ah	15 min	30 min
<b>BL1820B</b> 2.0Ah	24 <sub>min</sub>	45 min
<b>BL1830B</b> 3.0Ah	22 min	60 min
<b>BL1840B</b> 4.0Ah	36 min	90 min
<b>BL1850B</b> 5.0Ah	45 min	110 min
<b>BL1860B</b> 6.0Ah	55 min	130 min

### **Cordless Pole Saw**

# **DUA200**

Brake

Automatic Oiling

Toolless blade change

Guide bar length Chain speed 200 mm (8") 6.7 m/s 6.7 m/s Type: 80TXL, Pitch: 0.325", Gauge: 1.1 mm (0.043") 55 mL (1.9 oz.) 77 dB(A) 86 dB(A) Saw chain Oil tank capacity Sound pressure level Sound power level Noise K factor 3 dB(A) 3 dB(A) Cutting wood: 2.5 m/s<sup>2</sup> or less Cutting wood: 1.5 m/s<sup>2</sup> W/o Guide bar: 1,620 / 2,520 x 85 x 134 mm (63-3/4 / 99 x 3-3/8 x 5-1/4") W/o Guide bar: 1,460 - 2,360 mm (57-1/2 - 93") Vibration level Vibration K factor Dimensions (L x W x H) Length from the rear end of Trigger to the Tool tip Net weight 3.2 - 3.5 kg (7.1 - 7.7 lbs.) Net weight (Battery) Net weight (Attachment) BL1815N - BL1860B Guide bar, Saw chain, Chain oil

 ${\bf Standard\ Equipment:\ Chain\ oil,\ Band\ assembly,\ Guide\ bar\ case,\ Saw\ chain,\ Guide\ bar,\ Battery,\ Charger}$ 

The weight may differ depending on the attachment(s), including the battery cartridge. Items of standard equipment and specifications may vary by country or area.

# Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

