



**Cordless Blower  
UB003G**



**XGT**  
**40V** **Li-ion**  
**max**

# Air volume comparable to 28cc-class engine models



Blowing	
Max air volume	Max air velocity
<b>13.8</b> m <sup>3</sup> /min	<b>68</b> m/s 56m/s(Average)

Vacuuming	
Max air volume	Max sealed suction
<b>13.0</b> m <sup>3</sup> /min	<b>3.3</b> kPa


Tool-less switching between blower and vacuum



**XGT**  
**40V** Li-ion  
**max**

Delivers blower and vacuum  
models, with tool-less

**Insert. Rotate. Lock with one touch.**

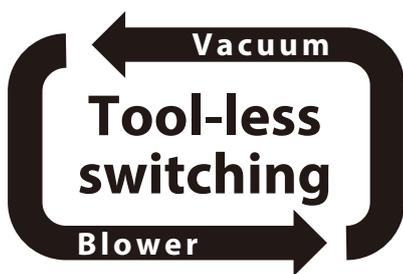


Compact storage



# vacuum air volume comparable to 28cc-class engine

## switching between blower and vacuum modes

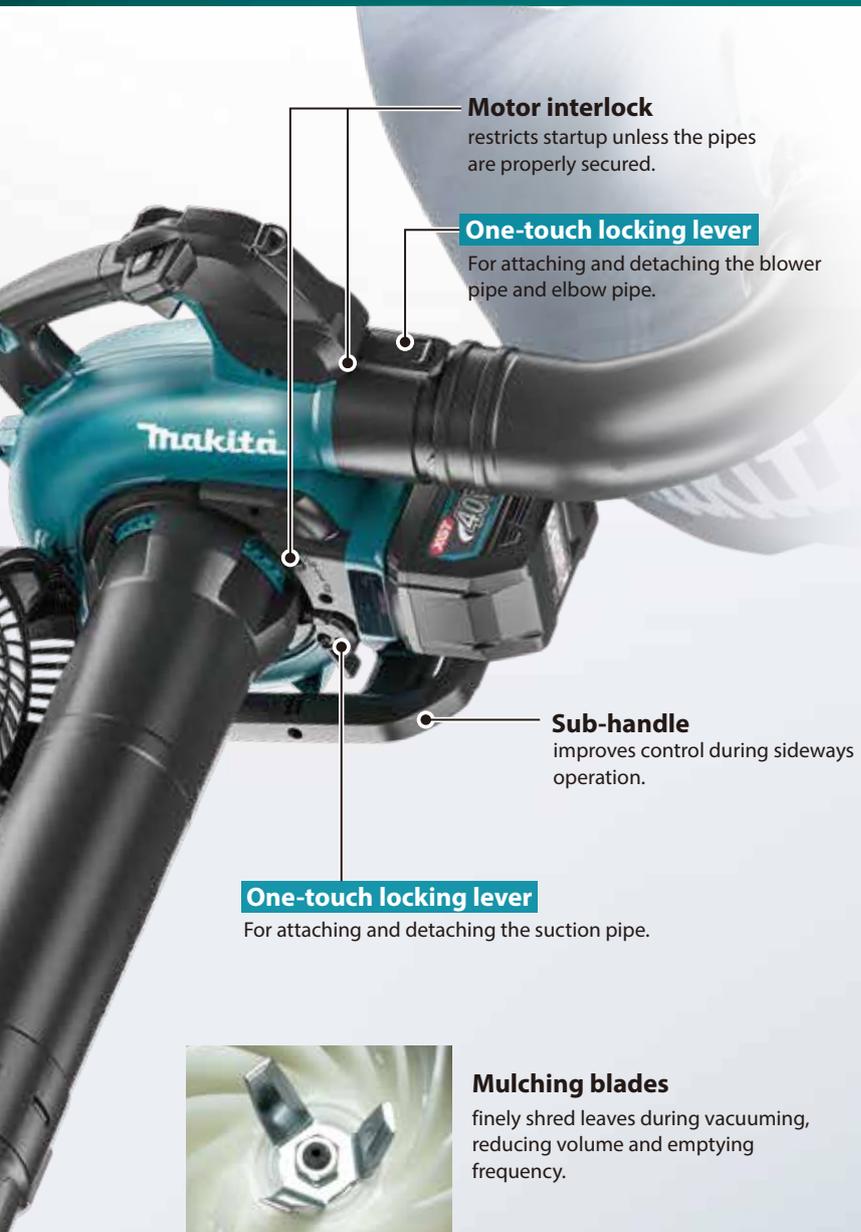

**Motor interlock**  
restricts startup unless the pipes are properly secured.


**One-touch locking lever**  
For attaching and detaching the blower pipe and elbow pipe.

**Sub-handle**  
improves control during sideways operation.

**One-touch locking lever**  
For attaching and detaching the suction pipe.



**Mulching blades**  
finely shred leaves during vacuuming, reducing volume and emptying frequency.

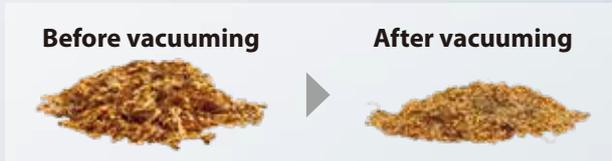

Before vacuuming

After vacuuming

## High water-resistance compatible with XPT

eXtreme Protection Technology



Continuous run time on a full battery charge


	With BL4080F battery	With BL4050F battery
Low mode	About <b>45 min</b>	About <b>30 min</b>
High mode	About <b>15 min</b>	About <b>9 min</b>




### Vacuum

Dust bag capacity **50L**

With two zipper tabs for easier and wider opening during disposal.



### Blower

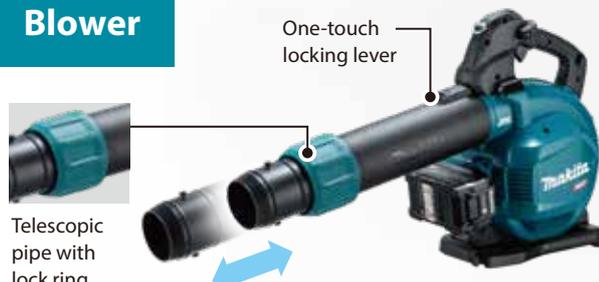

One-touch locking lever

Telescopic pipe with lock ring

Stepless adjustment within a **130 mm** range

## Air volume is adjustable from gentle to strong.

**Cruise control lever**  
reduces finger fatigue during continuous use.



Cruise control lever

Trigger operation is also available.



**Mode switch button**  
provides tactile feedback for quick switching.



Low mode  
High mode

Clear click feedback

## VS001G Cordless Vacuum Sweeper

1. Capable of cleaning dust or waste of all sizes
2. Dust container capacity 24L

Dust pickup rate  
about  
**90%**

Cleaning width  
with Side brush

**650 mm**



### Accessories

**Flat nozzle set**  
Part No. 1916V7-8



**Gutter nozzle set**  
Part No. 191B03-8



**Adapter pipe 80-72 set**  
Part No. 191L13-5



For connecting the gutter nozzle set

**Vacuum kit set**  
Part No. 1916T9-0



Capacity: 50 L

**Dust bag set**  
Part No. 191P40-6



Capacity: 25 L

### Charging Time

	Fast Charging	
	DC40RA	DC40RC
<b>BL4020</b> 2.0Ah	<b>22 min</b>	<b>30 min</b>
<b>BL4025</b> 2.5Ah	<b>28 min</b>	<b>38 min</b>
<b>BL4040</b> 4.0Ah	<b>45 min</b>	<b>67 min</b>
*1 <b>BL4040F</b> 4.0Ah	<b>45 min</b>	<b>67 min</b>
*1 <b>BL4050F</b> 5.0Ah	<b>50 min</b>	<b>85 min</b>
*1 <b>BL4080F/H</b> 8.0Ah	<b>76 min</b>	<b>170 min</b>

\*1 Recommended battery

### Cordless Blower

#### UB003G

- Variable Speed
- Brake
- Anti-restart function
- Constant Speed

<b>Blower function</b>	Max blowing force: 7 / 16N Max air volume: 9.4 / 13.8 m <sup>3</sup> /min (332 / 487 CFM) Max air velocity: 0 - 46 / 68 m/s (0 - 103 / 152 MPH) Avg. air velocity: 0 - 38 / 56 m/s (0 - 85 / 125 MPH) Continuous use: 30 / 9 min
(Battery)	BL4050F
<b>Vacuum function</b>	Max air volume: 13.0 m <sup>3</sup> /min (459 CFM) Max sealed suction: 3.3 kPa Dust bag capacity: 50 L (13.2 gal) Continuous use: 30 / 9 min
(Battery)	BL4050F
Sound pressure level	86.8dB(A) (EN IEC 62841-4-6)
Sound power level	97.3dB(A) (EN IEC 62841-4-6)
Uncertainty (K) for Noise	1.7 dB(A) (EN IEC 62841-4-6, Sound pressure level), 1.8 dB(A) (EN IEC 62841-4-6, Sound power level)
Vibration level	2.0m/s <sup>2</sup> (EN IEC 62841-4-6)
Uncertainty (K) for Vibration	1.5m/s <sup>2</sup> (EN IEC 62841-4-6)
Dimensions (L x W x H)	699 - 830 x 201 x 400 mm (27-1/2 - 32-3/4 x 7-7/8 x 15-3/4")
(Attachment)	With the blower nozzle at shortest to longest, w/o the vacuum kit
Net weight	5.0 - 6.1 kg (11.0 - 13.4 lbs.)
(Battery)	BL4050F
(Attachment)	Min: with the blower pipe and nozzle, Max: with the vacuum kit

Standard Equipment : Flat nozzle, Vacuum kit, Band assembly, Hex wrench, Battery, Charger

The net weight value includes the lightest and heaviest combination of the attachment(s) for normal and safe use and battery cartridge(s) which are specified in the instruction manual.  
Items of standard equipment and specifications may vary by country or area.

**Makita Corporation**

3-11-18 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

