



Cordless Metal Connector Nailer DBN640

LXT

Slim nose design for excellent visibility and corner nailing



Nail type: Metal connector nail

Length **38 - 64 mm**

Gauge **3.3 - 4.1 mm**

Collation
angle display **30 - 35 °**

BL **XPT**
MOTOR

High-power BL motor and pneumatic spring for driving nails up to 64 mm

18V
LITHIUM-ION

BL
MOTOR

Anti-dry fire mechanism

Minimizes the chance of dry firing by locking the contact arm when the remaining nails are 4 to 5.

LED job light

- Single LED
- With preglow and afterglow functions



Driving depth adjustment

Driving depth can be adjusted by dial.

Slim nose design

The slim nose design makes it easy to aim into the holes of metal reinforcement connectors used at beam-to-column joints, enabling accurate corner nailing.



On-tool storage of Hex wrench




XPT eXtreme Protection Technology



Hooks

- Different hooks can be attached to the left and right sides for various work applications.
- The rafter hook can be attached to the opposite side of the belt hook. The width of the hook portion is 2-1/2", allowing for hooking the tool on ladders, scaffolding, and 3x timbers.

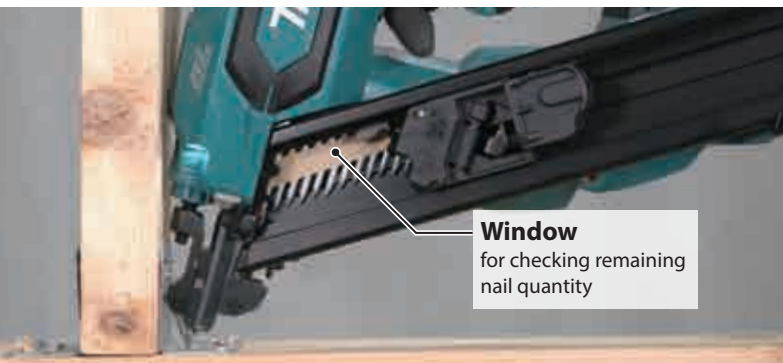

Window
for checking remaining
nail quantity

**Approx work
volume on a full
battery charge**

1,000 shots
With BL1860B battery



Charging Time

	Fast Charging DC18RC	DC18SD
BL1815N 1.5Ah	15 min	30 min
*1 BL1820B 2.0Ah	24 min	45 min
*1 BL1830B 3.0Ah	22 min	60 min
*1 BL1840B 4.0Ah	36 min	90 min
*1 BL1850B 5.0Ah	45 min	110 min
*1 BL1860B 6.0Ah	55 min	130 min

*1 Recommended battery

Cordless Metal Connector Nailer

DBN640

- Anti-restart function
- Depth Adjustment
- Auto Firing Stop
- Built-in Job Light
- Carrying Case

Nail capacity	Length: 38 - 64 mm (1-1/2 - 2-1/2") Gauge: 3.3 - 4.1 mm (0.131 - 0.162") Collation angle display: 30 - 35° Max magazine capacity: 31 nails
Work volume on a full battery charge (Battery)	1,000 shots (BL1860B)
Vibration level	4.2 m/s ² (EN60745-2-16)
Uncertainty (K) for Vibration	1.5 m/s ² (EN60745-2-16)
Sound pressure level	92 dB(A) (EN60745-2-16)
Sound power level	103 dB(A) (EN60745-2-16)
Uncertainty (K) for Noise	3 dB(A) (EN60745-2-16)
Dimensions (L x W x H) (Battery)	326 x 185 x 359 mm (12-7/8 x 7-1/4 x 14-1/8") (BL1860B)
Net weight (Battery)	5.2 kg (11.5 lbs.) (BL1860B)

Standard Equipment : Hex wrench, Hook, Rafter hook, Battery, Charger

The net weight value includes the lightest and heaviest combination of the attachment(s) for normal and safe use and battery cartridge(s) which are specified in the instruction manual.
Items of standard equipment and specifications may vary by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan



PRINTED IN JAPAN 202603

www.makita.com