



Cordless Impact Driver DTD158



Easy-to Handle Basic Impact Driver



Max fastening torque

170 N·m

High-speed rotation

Max

3,400 min⁻¹

Lightweight at

1.6 kg

with BL1860B



Easy-to Handle Basic Impact Driver


Optimal battery location

BL
MOTOR


High-power
brushless motor

The center of gravity has been moved closer to the center line of the grip, by locating the battery 12mm backward compared with the current model, reducing the strain on the wrist during operation.

DTD158

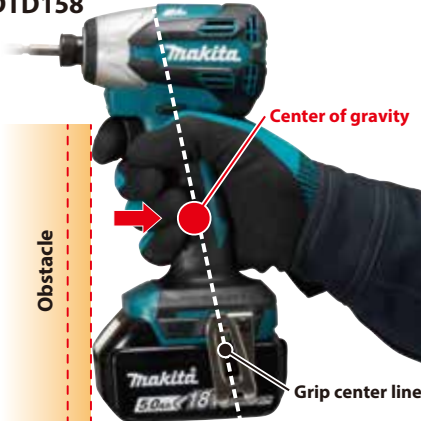

Current model

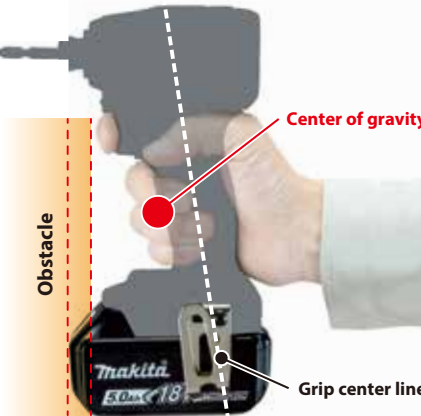

One-touch bit installation

No need to pull bit sleeve for bit installation

Built-in LED light

with preglow and afterglow functions illuminates the work area



Variable speed control by trigger

Ergonomically designed handle with soft grip

provides comfortable grip and more control while minimizing hand fatigue and pain.

18V
LITHIUM-ION

XPT

eXtreme Protection Technology



Charging Time

	Fast Charging	
	DC18RC	DC18SD
*1BL1815N 1.5Ah	15 min	30 min
*1BL1820B 2.0Ah	24 min	45 min
*1BL1830B 3.0Ah	22 min	60 min
*1BL1840B 4.0Ah	36 min	90 min
*1BL1850B 5.0Ah	45 min	110 min
*1BL1860B 6.0Ah	55 min	130 min
BL1890 9.0Ah	85 min	200 min
BL18120 12.0Ah	120 min	265 min

	LXT BASIC	DCB18WA
Compatible with charger DCB18WA only		
*1BLB182 2.0Ah		90 min

Accessories

Tool hanger set

Part No.
191K57-9



Hook set

Part No.
194654-4



Battery protector set

Part No.
194649-7



Cordless Impact Driver

DTD158

- Variable Speed
- Brake
- Reversing
- Built-in Job Light
- Carrying Case

*EN62841-2-2
Standard Equipment:
Hook, Battery, Charger

Capacity	Machine screw: M4 - M8 (5/32" - 5/16"), Standard bolt: M5 - M16 (3/16" - 5/8") High strength bolt: M5 - M14 (3/16" - 9/16") Coarse thread (in length): 22 - 125mm (7/8" - 4-7/8")
Max fastening torque	170 N·m (1,500 ft.lbs.)
Impacts per minute	0 - 3,600 min ⁻¹
No load speed	0 - 3,400 min ⁻¹
Vibration level	10.9 m/s ² : * Impact tightening of fasteners of the maximum capacity of the tool
Uncertainty (K) for Vibration	2.0 m/s ² *
Sound pressure level	97 dB (A)*
Sound power level	105 dB (A)*
Noise K factor	3 dB (A)*
Dimensions (L x W x H)	125 x 81 x 233 - 251 mm (4-7/8 x 3-3/16 x 9-1/8 - 9-7/8")
(Battery)	(BLB182 - BL1860B)
Net weight (Battery)	1.3 - 1.6 kg (2.9 - 3.5 lbs.) (BLB182 - BL1860B)

The net weight value includes the lightest and heaviest combination of the attachment(s) for normal and safe use and battery cartridge(s) which are specified in the instruction manual.

Items of standard equipment and specifications may vary by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan



PRINTED IN JAPAN 202601

www.makita.com

*1 Recommended battery

