



Cordless Blower Vacuum  
UB005G



**40V** Li-ion  
**max**

Lightweight yet  
powerful for  
professional use

Max  
suction power  
[Vacuum mode]

**150 W**

Max  
air velocity  
[Blower mode]

**87.0 m/s**

One-touch lever switch to vacuuming



## Powerful blowing × Powerful vacuuming

**Blowing**

**Vacuuming**



**One-touch lever switching**

**Max air velocity**  
**Blower mode** **87.0 m/s**  
Average air velocity: 71.0 m/s  
**Max air volume: 3.5 m<sup>3</sup>/min**

**Max suction power**  
**Vacuum mode** **150 W**  
**Max sealed suction: 4.2 kPa**

## Adjustable air volume from gentle breeze to strong wind

**Stepless variable-speed cruise control lever**  
reduces finger fatigue during continuous use.



**Mode switch button**  
provides tactile feedback for quick switching.




**Clear click feedback**


**Recommended use**



Collects only fallen leaves while avoiding small stones

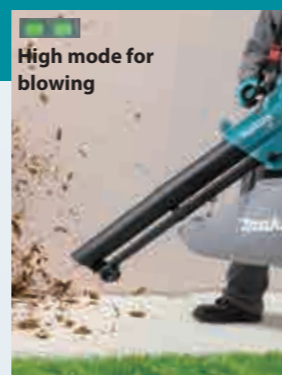

Powerfully blows away a large amount of fallen leaves

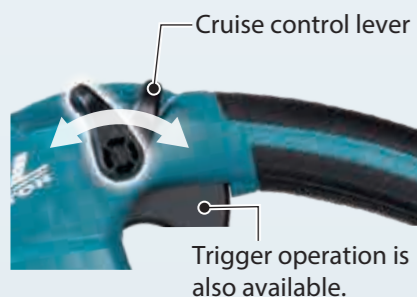

Cruise control lever

Trigger operation is also available.

**BL MOTOR** High-power brushless motor for professional applications

**XPT** Water-resistance compatible with XPT

**LED job light**

activated by the trigger, enhancing visibility in low-light conditions.



Lightweight at **4.4 kg**  
With BL4040F battery, Dust bag

**Blower/Vacuum switch lever**

**Wide-opening dust bag**  
The side opens wide for easier emptying.

**Twin-wheel castors**

Enhanced stability during vacuuming, with tool-free attachment and removal.

**Approx. continuous run time on a full battery charge**  
(With BL4040F battery, max air volume)


	Mode 1	Mode 2
Blower	About <b>16 min</b>	About <b>12 min</b>
Vacuum	About <b>13 min</b>	About <b>10 min</b>

**Mulching function**

High-durability metal shredder significantly reduces leaf volume during vacuuming.



Before vacuuming



After vacuuming



**Easy foreign-object removal**

Open the fan cover with the thumbscrew to remove tangled plastic string and other debris.



\*The machine will not start when the fan cover is open.

Also available

**Cordless Blower series**

**UB001G** (Blower function only)  
Powerful blowing force (Max 17N)



**UB003G**

Blowing and vacuuming performance comparable to 28cc-class engine models.



**UB004G** (Blower function only)

Efficiency equal to or greater than that of 64cc-class Blowers



**Accessories**

**Harness cover set**

The addition of a thick pad ensures lasting comfort, even during extended use.

Part No. 1917G3-7



**Wide nozzle set**

Wide Nozzle for Efficient Ground Collection

Part No. 1918B8-8



**Charging Time**

	Fast Charging	
	DC40RA	DC40RC
<b>BL4020</b> 2.0Ah	22 min	30 min
<b>BL4025</b> 2.5Ah	28 min	38 min
<b>BL4040</b> 4.0Ah	45 min	67 min
*1 <b>BL4040F</b> 4.0Ah	45 min	67 min
*1 <b>BL4050F</b> 5.0Ah	50 min	85 min
*1 <b>BL4080F/H</b> 8.0Ah	76 min	170 min

\*1 Recommended battery

**Cordless Blower Vacuum**

**UB005G**

- Variable Speed
- Brake
- Anti-restart function
- Electronic 2-Speed
- Constant Speed
- Built-in Job Light

**Standard Equipment :**

- Wide nozzle,
- Shoulder harness,
- Dust bag

Vacuum function (Other conditions)	Max air volume: 6.2 (Mode 1) / 6.8 (Mode 2) m <sup>3</sup> /min (219 (Mode 1) / 240 (Mode 2) CFM) Avg. air velocity: 19 (Mode 1) / 20 (Mode 2) m/s (43 (Mode 1) / 45 (Mode 2) MPH) Max sealed suction: 3.5 (Mode 1) / 4.2 (Mode 2) kPa Max suction power: 110 (Mode 1) / 150 (Mode 2) W Dust bag capacity: 25 L (845.4 oz)
(Battery)	BL4040F
Vacuum function, Continuous use (Other conditions)(Battery)	13 (Mode 1) / 10 (Mode 2) min (BL4040F), 21 (Mode 1) / 26 (Mode 2) min (BL4080F/H)
Blower function (Other conditions)	Max blowing force: 4.0 (Mode 1) / 5.0 (Mode 2) N Max air volume: 3.1 (Mode 1) / 3.5 (Mode 2) m <sup>3</sup> /min (110 (Mode 1) / 124 (Mode 2) CFM) Max air velocity: 78.0 (Mode 1) / 87.0 (Mode 2) m/s (174 (Mode 1) / 195 (Mode 2) MPH) Avg. air velocity: 64.0 (Mode 1) / 71.0 (Mode 2) m/s (143 (Mode 1) / 159 (Mode 2) MPH)
(Battery)	BL4040F
Blower function, Continuous use (Other conditions)(Battery)	16 (Mode 1) / 12 (Mode 2), 33 (Mode 1) / 25 (Mode 2) min
Sound pressure level	88 dB(A) (EN IEC 62841-4-6)
Sound power level	99.6 dB(A) (EN IEC 62841-4-6)
Uncertainty (K) for Noise	1.7 dB(A) (Sound pressure level, EN IEC 62841-4-6), 1.6 dB(A) (Sound power level, EN IEC 62841-4-6)
Vibration level	1.3 m/s <sup>2</sup> (EN IEC 62841-4-6)
Uncertainty (K) for Vibration	1.5 m/s <sup>2</sup> (EN IEC 62841-4-6)
Dimensions (L x W x H)(Other conditions)	1,169 x 184 x 412 mm (46 x 7-1/4 x 16-1/4") (w/o Dust bag)
Net weight (Battery)	4.4 kg (9.7 lbs.) (BL4040F)

The net weight value includes the lightest and heaviest combination of the attachment(s) for normal and safe use and battery cartridge(s) which are specified in the instruction manual. Items of standard equipment and specifications may vary by country or area.

**Makita Corporation**

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

