

Also available

**Attachments for UX01G Multi function power head**

Various attachments are available for different applications.



Multi function power head UX01G

**Brushcutter**

EM402MP / EM403MP  
EM404MP / EM405MP  
EM406MP

**Grass trimmer**

EM408MP  
EM409MP

**Rotary Scissors**

EM407MP

**Ground trimmer**

**Angle adjustment:**  
EN420MP  
EN421MP  
EN422MP

**Angle adjustment**

**Ground trimmer**

**T-shaped:**  
EN424MP  
EN425MP

**T-shaped**

EM408MP

EM407MP

EN422MP

EN420MP

EN425MP



EM408MP



EM407MP



EN421MP



EN424MP

Accessories

**Shear blade 500 set**

Part No. 1916X3-0



**Shear blade 330 set**

Part No. 1912V6-6



Charging Time

Battery	Fast Charging	
	DC40RA	DC40RC
*1 BL4020 2.0Ah	22 min	30 min
*1 BL4025 2.5Ah	28 min	38 min
*1 BL4040/F 4.0Ah	45 min	67 min
*1 BL4050/F 5.0Ah	50 min	85 min
*1 BL4080/F/H 8.0Ah	76 min	170 min

\*1 Recommended battery

**Cordless Ground Trimmer**

**UG001G**

Brake	Blade	Length: 521 mm (20-1/2") Effective cutting width: 500 mm (19-3/4") Tooth spacing: 28 mm (1-1/8")
Anti-restart function	No load speed	High / Low: 2,000 / 1,500 min <sup>-1</sup>
Electronic 2-Speed	Cutting strokes per minute	High / Low: 4,000 / 3,000 min <sup>-1</sup>
Constant Speed	Continuous use (Battery)	High / Low: 90 / 160 min. (BL4040F)
Soft start	Wheel diameter (Front / Rear)	180 / 300 mm (7-1/8 / 11-3/4")
<b>Standard Equipment:</b>	Wheel width (Front / Rear)	41 / 60 mm (1-5/8 / 2-3/8")
Blade cover, Hex wrench	Wheel Distance between wheel centers	Front: 258 mm (10-1/8")
	Cutting height adjustment	Range: 25 - 105 mm (1 - 4-1/8")
	Vibration level	0.9 m/s <sup>2</sup> (IEC62841-4-4)
	Uncertainty (K) for Vibration	1.5 m/s <sup>2</sup> (IEC62841-4-4)
	Sound pressure level	73 dB(A) (EN12733)
	Uncertainty (K) for Noise	3 dB(A) (Sound pressure level, EN12733)
	Sound power level	90 dB(A) (Guaranteed, EN12733), 88.4 dB(A) (Measured, EN12733)
	Uncertainty (K) for Noise	1.7 dB(A) (Measured sound power level, EN12733)
	Dimensions (L x W x H)	1,345 x 521 x 791 mm (53 x 20-1/2 x 31-1/8")
	Net weight (Battery)	10 kg (22.1 lbs.) (BL4040F)

The net weight value includes the lightest and heaviest combination of the attachment(s) for normal and safe use and battery cartridge(s) which are specified in the instruction manual.

Items of standard equipment and specifications may vary by country or area.

**Makita Corporation**

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan



PRINTED IN JAPAN 202603

www.makita.com

Easy, effortless  
grass cutting  
with a simple push

Cutting width:  
**500 mm**



Wide cutting width with  
a self-standing three-wheel design  
for fast, stable grass cutting.

# Fast. Easy. Stable.

## Ideal for wide-area grass cutting



Cutting width:  
**500 mm**

Wide front wheels for stable, easy traveling on uneven ground

Optimized center-of-gravity design for light-push cutting  
Large tire supports the weight, reducing operator fatigue.


Center of gravity

Large tire (ø300 mm)  
Smooth travel on uneven ground and easy turning.

Front tire (ø180 mm)

Single-sided blade for lower-risk grass cutting  
The cutting edge does not face the operator.

**Tool-less handle height adjustment**  
3 positions to suit operator's height  
[790 mm / 910 mm / 1,020 mm]

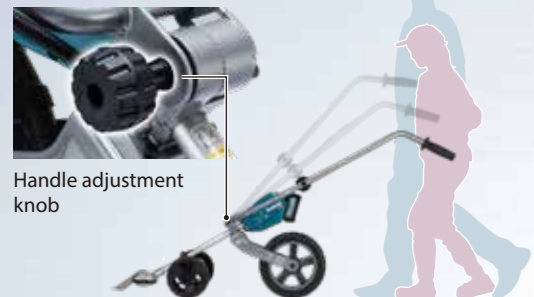

Handle adjustment knob

**Tool-less cutting-height adjustment**  
supports higher height cutting, with stepless adjustment using the one-touch locking lever.

**25 mm**




Min. cutting height

**105 mm**



Max. cutting height

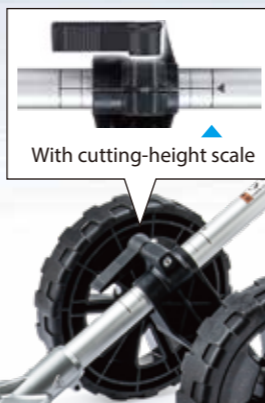

With cutting-height scale

No side-to-side swinging. Less fatigue. Efficient cutting.


**Compact storage**

Loosen the thumb nuts to fold the handle. Fits in compact cars.\*  
\* May vary by vehicle.



Can be stored upright

**Mode switch button provides tactile feedback for quick switching.**

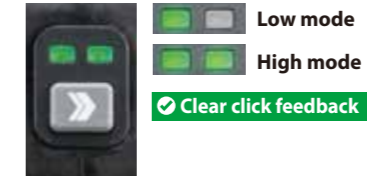

Low mode  
High mode  
Clear click feedback

Low noise and vibration  
+  
Zero exhaust emissions

**BL MOTOR** High-power Brushless motor

**XPT** Water-resistance compatible with XPT

Approx. cutting area on a full battery charge



**900 m<sup>2</sup>**

With BL4040 battery, high mode, grass height: approx. 300 - 400 mm  
(Cutting area varies with grass type/density.)

Approx. continuous runtime on a full battery charge  
(With BL4040 battery)

Low mode:  
**2 hr 40 min**  
High mode:  
**1 hr 30 min**

Highly durable metal under-plate

**Single-sided hedge-trimmer blades reduce stone scatter**

Blades with curved tips	Sharp cutting
<p>More acute edge angle and precise edge alignment</p> <p>Upper blade</p> <p>Lower blade</p> <p>Image</p> <p>Only the sharpened edges of the upper and lower blades make contact.</p>	<p>Three-facet ground blades</p> <p>Highly rigid guide bar</p> <p>Special coating</p> <p>resists sap buildup and rust.</p>

Recommended uses			
Home:	Public:	Agricultural:	Maintenance:
 garden weeds, lawns	 sports fields, parks, vacant lots	 field ridges and levees	 roadsides, riverbanks

# No side-to-side swinging. Less fatigue. Efficient cutting.

## Compact storage

Loosen the thumb nuts to fold the handle. Fits in compact cars.\*

\* May vary by vehicle.



Can be stored upright

## Mode switch button provides tactile feedback for quick switching.



- Low mode
- High mode
- Clear click feedback

**Low noise and vibration**  
+  
**Zero exhaust emissions**



**High-power Brushless motor**



**Water-resistance compatible with XPT**



Battery is sold separately

Highly durable metal under-plate

**Approx. cutting area on a full battery charge**



With BL4040 battery, high mode, grass height: approx. 300 - 400 mm (Cutting area varies with grass type/density.)

**Approx. continuous runtime on a full battery charge**

(With BL4040 battery)

**Low mode:**  
**2 hr 40 min**


---

**High mode:**  
**1 hr 30 min**

## Single-sided hedge-trimmer blades reduce stone scatter

Blades with curved tips	Sharp cutting
-------------------------	---------------

**More acute edge angle and precise edge alignment**



- Three-facet ground blades
- Highly rigid guide bar
- Special coating

resists sap buildup and rust.

Only the sharpened edges of the upper and lower blades make contact.

Recommended uses			
Home:	Public:	Agricultural:	Maintenance:
 garden weeds, lawns	 sports fields, parks, vacant lots	 field ridges and levees	 roadsides, riverbanks

# Fast. Easy. Stable.

## Ideal for wide-area grass cutting



Cutting width:  
**500 mm**

Wide front wheels for stable, easy traveling on uneven ground



**Optimized center-of-gravity design for light-push cutting**  
 Large tire supports the weight, reducing operator fatigue.

Center of gravity


**Large tire (ø300 mm)**  
 Smooth travel on uneven ground and easy turning.

Front tire (ø180 mm)

**Single-sided blade for lower-risk grass cutting**  
 The cutting edge does not face the operator.

### Tool-less handle height adjustment

3 positions to suit operator's height  
 [790 mm / 910 mm / 1,020 mm]

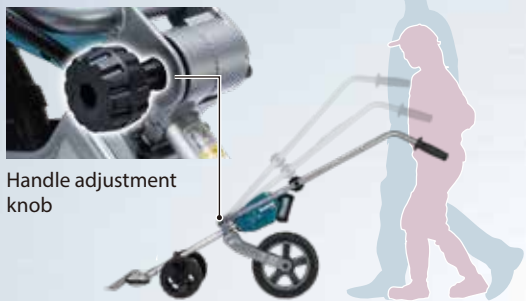

Handle adjustment knob

### Tool-less cutting-height adjustment

supports higher height cutting, with stepless adjustment using the one-touch locking lever.

**25 mm**




Min. cutting height

**105 mm**



Max. cutting height

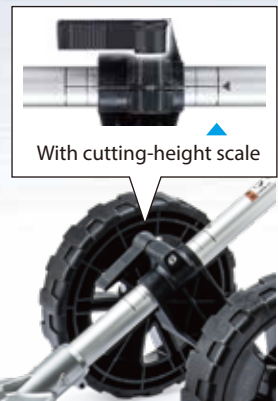

With cutting-height scale

Also available

## Attachments for UX01G Multi function power head

Various attachments are available for different applications.



Multi function power head  
UX01G

**Brushcutter**

EM402MP / EM403MP  
EM404MP / EM405MP  
EM406MP

**Grass trimmer**

EM408MP  
EM409MP

**Rotary Scissors**

EM407MP


**Ground trimmer**

**Angle adjustment:**  
EN420MP  
EN421MP  
EN422MP

Angle adjustment

**Ground trimmer**

**T-shaped:**  
EN424MP  
EN425MP  
T-shaped

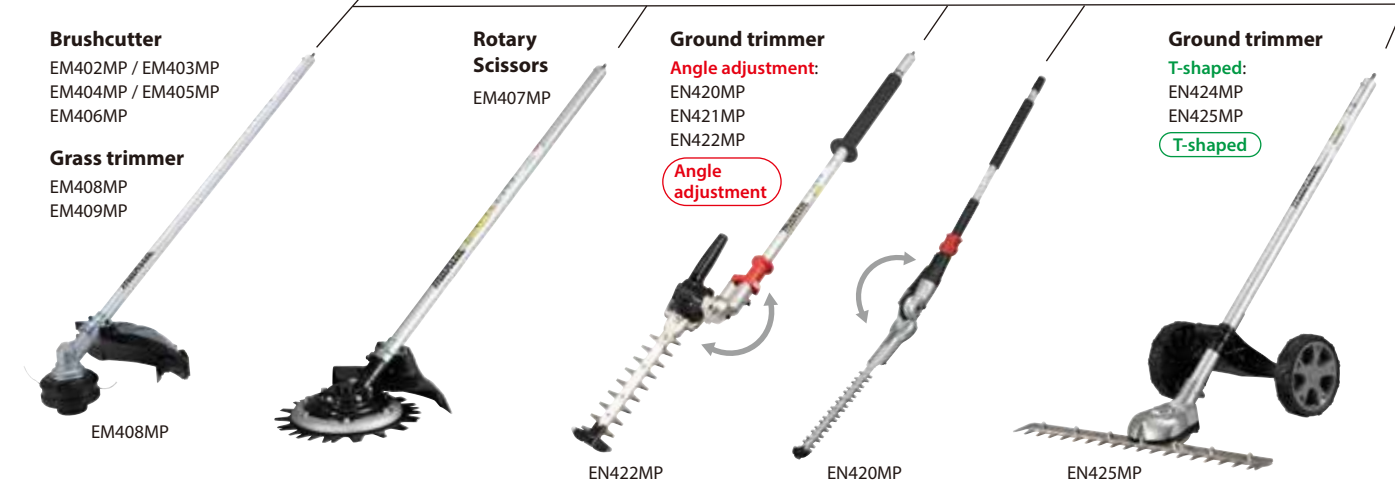

Accessories

**Shear blade 500 set**

Part No. 1916X3-0



**Shear blade 330 set**

Part No. 1912V6-6



Charging Time

	Fast Charging	
	DC40RA	DC40RC
*1 BL4020 2.0Ah	22 min	30 min
*1 BL4025 2.5Ah	28 min	38 min
*1 BL4040/F 4.0Ah	45 min	67 min
*1 BL4050F 5.0Ah	50 min	85 min
*1 BL4080F/H 8.0Ah	76 min	170 min

\*1 Recommended battery

**Cordless Ground Trimmer**

**UG001G**

Brake	Blade	Length: 521 mm (20-1/2") Effective cutting width: 500 mm (19-3/4") Tooth spacing: 28 mm (1-1/8")
Anti-restart function	No load speed	High / Low: 2,000 / 1,500 min <sup>-1</sup>
Electronic 2-Speed	Cutting strokes per minute	High / Low: 4,000 / 3,000 min <sup>-1</sup>
Constant Speed	Continuous use (Battery)	High / Low: 90 / 160 min. (BL4040F)
Soft start	Wheel diameter (Front / Rear)	180 / 300 mm (7-1/8 / 11-3/4")
<b>Standard Equipment:</b>	Wheel width (Front / Rear)	41 / 60 mm (1-5/8 / 2-3/8")
Blade cover, Hex wrench	Wheel Distance between wheel centers	Front: 258 mm (10-1/8")
	Cutting height adjustment	Range: 25 - 105 mm (1 - 4-1/8")
	Vibration level	0.9 m/s <sup>2</sup> (IEC62841-4-4)
	Uncertainty (K) for Vibration	1.5 m/s <sup>2</sup> (IEC62841-4-4)
	Sound pressure level	73 dB(A) (EN12733)
	Uncertainty (K) for Noise	3 dB(A) (Sound pressure level, EN12733)
	Sound power level	90 dB(A) (Guaranteed, EN12733), 88.4 dB(A) (Measured, EN12733)
	Uncertainty (K) for Noise	1.7 dB(A) (Measured sound power level, EN12733)
	Dimensions (L x W x H)	1,345 x 521 x 791 mm (53 x 20-1/2 x 31-1/8")
	Net weight (Battery)	10 kg (22.1 lbs.) (BL4040F)

The net weight value includes the lightest and heaviest combination of the attachment(s) for normal and safe use and battery cartridge(s) which are specified in the instruction manual.

Items of standard equipment and specifications may vary by country or area.

**Makita Corporation**

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan






**Cordless Ground Trimmer**  
**UG001G 500mm (19-3/4")**



**XGT**  
**40V** LI-ION  
**max**

Easy, effortless  
grass cutting  
with a simple push

Cutting width:  
**500 mm**

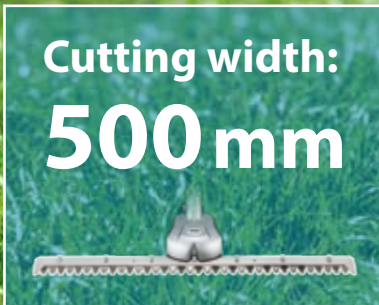

Wide cutting width with  
a self-standing three-wheel design  
for fast, stable grass cutting.

