Satisfy Professional's Needs

XGT

Makita® Cordless Chain Saw (Top-handle) UC032G

XGT 40V max Li-ion

Greater cutting efficiency than 35 cc-class chain saws*1*2 with a lightweight design



Lightweight at 4.1 kg

Battery: BL4040F, Guide bar length: 350 mm, Saw chain: 80TXL

BL MOTOR IPX4 XPT

*1 Among professional engine-powered and cordless top-handle chain saws in the 35 cc class, based on our research as of July 2026.
*2 When cutting a ø300 mm cedar log with an 80TXL saw chain and a BL4040F battery.

Excellent maneuverability with a lightweight, optimally balanced design



Lightweight at
4.1 kg
Battery: BL4040F, Guide bar 350 mm
Saw Chain 80TXL

Cutting amount
on a full battery charge
About 25 cuts
ø300 mm cedar log
Battery: BL4040F, Saw chain: 80TXL






Optimal balance reduces arm strain during horizontal cutting

Excellent restartability (when locked)
If the tool locks due to load, removing the load immediately allows the motor to start again without retriggering, making it possible to resume cutting operations.




Main power button with enhanced operability
Tactile button operation with gloves and clear tool status indicators

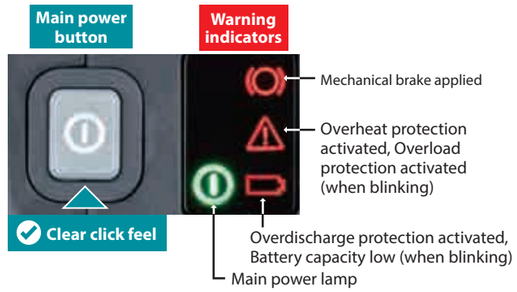

Other features

Easily operable front hand guard
The shorter distance between the front handle and front hand guard makes it easier to release the brake.



Enhanced usability
Redesigned lock-off lever with a release lever and 5-minute auto power-off.

Variable speed trigger
Allows for speed adjustments based on the material or application.

Hook
with quick attachment/ detachment
Allows one-handed attachment to and removal from a carabiner or similar devices.





Adjustable automatic chain lubrication



Captive nut
helps prevent loss of nut when removing sprocket cover to replace the guide bar or saw chain.

Improved chip discharge
reduces chip accumulation inside the sprocket cover for easier maintenance.

Compatible Guide bar length
300/ 350/ 400 mm
saw chain type: 80TXL, 91PX

High water-resistance
allows to operate the machine even if it is wet with water.

IPX4
This tool is rated IPX4 for water resistance.

XPT
High water-resistance compatible with eXtreme Protection Technology




Max. chain speed
25.0 m/s



BL MOTOR

High efficiency with Outer-rotor brushless motor and Direct-drive system


Engine-like sustained power under load
When the user presses the tool against the material with excessive force, they can feel a decrease in rotation speed, making it easy to adjust the load on the cutting edge.

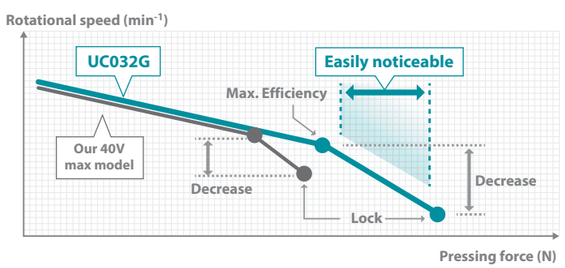

+

Excellent acceleration
Enhanced trigger response provides fast acceleration, enabling efficient continuous and repetitive cutting tasks such as pruning.



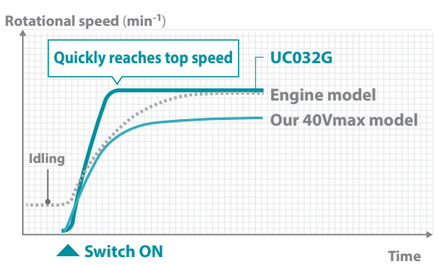

XGT 40Vmax Li-ion

Accessories

Guide Bar / Saw Chain / Guide Bar Cover / Drive sprocket

Cutter type: CC: Chamfer chisel, MC : Micro chisel








Guide Bar				Saw Chain						Drive sprocket	
Bar length	Motor Mount	Type	Part No.	No. of drive links	Gauge	Pitch	Type OREGON	Cutter type	Part No. (Carton)	Type	Part No.
30cm/12"	A041	Sprocket nose bar	191T86-6	51	1.1mm/ 0.043"	0.325"LP	80TXL	MC	191T90-5	Sprocket 0.325" LP 7 tooth	191V91-5
35cm/14"	A041		191T87-4	59					191T91-3		
40cm/16"	A041		191T88-2	64					191T92-1		
30cm/12"	A041	Sprocket nose bar	191G23-2	46	1.3mm/ 0.050"	3/8"LP	91PX	CC	191H10-7	Sprocket 3/8" LP 6 tooth	191V90-7
35cm/14"	A041		191G24-0	52					191H11-5		
40cm/16"	A041		191G25-8	56					191H12-3		

Saw chain M43K (Similar to 91PX) Low profile chain blades.

Delivers 10% higher cutting efficiency than the 91PX, with approximately 15% longer cutters for extended use through repeated sharpening. The M43K is a "Yellow Label" saw chain. Not available in certain countries and regions.






Guide Bar	Saw Chain					Similar Saw Chain				
Bar length	Gauge	Pitch	Type Makita	No. of drive links	Part No. (Carton)	Gauge	Pitch	Type OREGON	No. of drive links	Part No. (Carton)
30cm/12"	1.3mm/ 0.050"	3/8" (Similar to LP)	M43K	46	1918J9-2	1.3mm/ 0.050"	3/8"LP	91PX	46	191H10-7
35cm/14"				52	1918K0-7				52	191H11-5
40cm/16"				56	1918K1-5				56	191H12-3

File and File holder

The file holder guides sharpening at 30° and controls depth to 4/5 of the file diameter.



Size	Saw chain type	File		File and File holder
		Q'ty	Part No.	Part No.
4.0mm	M43K, 80TXL 91PX	2	D-67359	D-70948
		12	D-67365	



Round file bit

6.35mm (1/4) Hex shank (MZ)



Angle plate

25 / 30deg





Size	Round file bit	Angle plate	Angle plate & file bit set
	Part No.	Part No.	Part No.
4.0mm	D-73748	D-75605	D-75611

File set in roll-up pouch

Round File(3pcs) / File Holder / Flat File / Handle(2pcs) / Depth Gauge set



Round file Size	Part No.
4.0mm	D-72154

Flat file and File handle



Flat file		File handle	
Q'ty	Part No.	Q'ty	Part No.
1	D-67452	1	D-67496
12	D-67468	50	D-67505

Filing vise



Part No.

D-67480




Depth gauge jointer

After sharpening the chain, check the height of the depth gauge using the chain gauge tool.



Part No.
D-67476



Chain oil

Capacity	Part No.
100ml	199897-3
1L	195093-1 196946-7



Charging Time

	Fast Charging DC40RA	DC40RC
BL4040 4.0Ah	45 min	67 min
*1 BL4040F 4.0Ah	45 min	67 min
*1 BL4050F 5.0Ah	50 min	85 min
BL4080F/H 8.0Ah	76 min	170 min

*1 Recommended battery

Cordless Chain Saw UC032G

- Variable Speed
- Brake
- Anti-restart function
- Constant Speed
- Automatic Oiling
- Chain Brake

Guide bar length	*300, 350, 400mm (12, 14, 16")*
Chain pitch	*0.325 / 3/8"*
Chain gauge	*1.1 / 1.3 mm (0.043 / 0.050")*
Oil tank capacity	*200 mL (6.8 oz)*
Sound pressure level	*96 dB (A) (EN62841-4-1)*
Sound power level	*104 dB (A) (EN62841-4-1)*
Uncertainty (K) for Noise	*3 dB (A) (EN62841-4-1)*
Vibration emission	*5.1 m/s (EN62841-4-1, Mode: Cutting wood)*
Uncertainty (K) for Vibration	*1.5 m/s² (EN62841-4-1, Mode: Cutting wood)*
Dimensions (Battery)	*309 - 635 x 193 x 219 mm (12-1/8 - 25 x 7-5/8 x 8-5/8") (BL4040F)*
Attachment	*w/o Guide bar, Saw chain - 350mm guide bar, Saw chain*
Net weight (Battery)	*4.1 - 5.1 kg (9.0 - 11.2 lbs.) (BL4040F - BL4080F)*
Attachment	*350 mm guide bar, 80TXL saw chain*

Standard Equipment : Guide bar, Guide bar case, Saw chain, Wrench, Chain oil, Round file

Standard equipment and accessories, product appearance and specifications may vary by country or region, and all test results, including work amount per charge and work efficiency, are for reference only and may vary depending on application and operating conditions.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 202608

www.makita.com