



**Makita**<sup>®</sup>

Circular Saw  
HS7601 190mm (7-1/2")

Satisfy Professional's Needs

**Compact and lightweight**




**1,200W**

Continuous rating input

**Two-finger trigger switch**

**Soft grip**  
provides more comfort

**Flat Motor Housing Design**  
increases stability when changing blades.

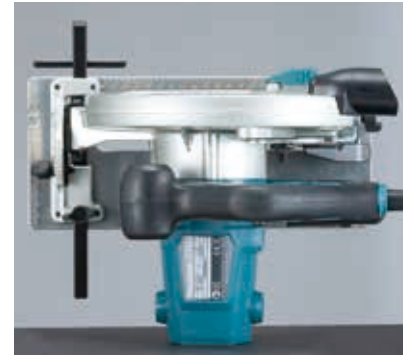

**Aluminum plate base**


**Aluminum diecast safety cover**

**1,200W**

Continuous rating input

**1 Rear dust exhaust port**

exhausts sawdust backward only, preventing it from scattering around to provide comfortable operation.

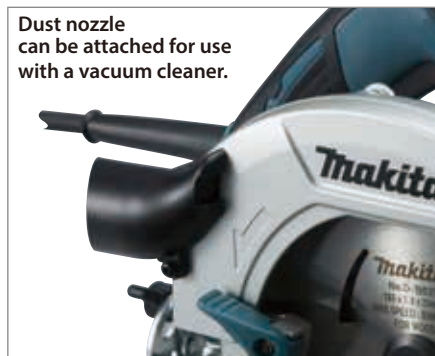

Dust nozzle can be attached for use with a vacuum cleaner.

**2 Single action lever**

for quick adjustment of cutting depth



**3 Rear angular guide**

For smooth and precise adjustment of bevel angle

**Compatible with Guide rail**

For use with Guide rail, the shape of base is designed to install Guide rail adapter.



Optional Guide rail adapter Part No. 197005-0

Rear angular guide

**Compact and lightweight**

Much more compact and lightweight than the predecessor model

Model No.	Overall length (mm)	Net weight (kg)
HS7601	309	4.0
Predecessor Model	345	4.9

**Circular Saw**

**HS7601 190mm (7-1/2")**

303

- Double Insulation
- Dust Collecting

<b>Continuous rating Input</b>	1,200W
<b>Max cutting capacity</b>	at 0 degrees : 66mm (2-5/8") at 45 degrees : 46mm (1-13/16")
<b>Blade diameter</b>	190mm (7-1/2")
<b>No load speed (rpm)</b>	5,200
<b>Dimensions (LxWxH)</b>	309x232x255 (12-1/8"x9-1/8"x10")
<b>Net weight</b>	4.0kg (8.8lbs)
<b>Power supply cord</b>	2.5m (8.2ft)

**Standard Equipment :**

TCT saw blade, Hex wrench, Guide rule (Rip fence), Dust nozzle

weight according to EPTA-Procedure 01/2003  
Items of standard equipment and specifications may vary by country or area.

**Makita Corporation**

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN BE-BA