

Satisfy Professional's Needs




Corded and Cordless LED Worklight DML805



Powered by both

AC and DC

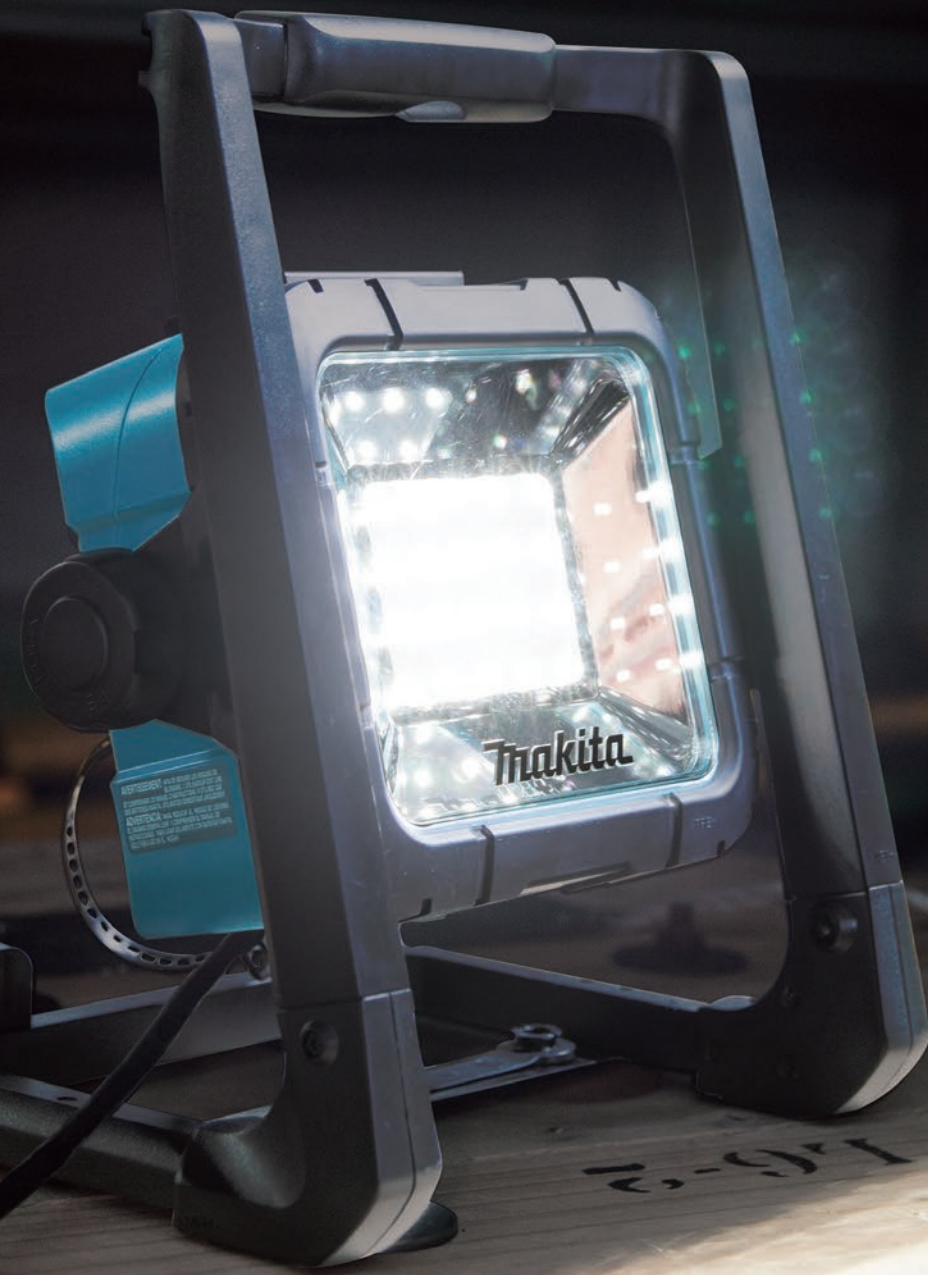

Twenty 0.5W white-light LEDs deliver bright and even light.



Powered by both...



Optional accessories



Makita tripod

Up to two DML805's can be mounted.
Height : 992-1,750mm
Set Screw : M8
Part No. GM00001381



Vise

Use for mounting DML805 on a scaffolding pipe, etc.
Set Screw : M8
Part No. GM00001396




Anti-glare film

Part No. A-58154

Battery capacity warning function

automatically notifies the user about reduction in battery capacity by reducing the brightness of light in the following steps.
Only one LED is on as drawn below. (This will continue about 13 minutes in case of using battery BL1815N.)

1. Full brightness, with all twenty LEDs on
2. Only one LED is on as drawn below. (This will continue about 10 minutes in case of using battery BL1815.)
3. All twenty LEDs turn off.



Light source					
	Illuminance (lx)		Luminous flux (lm)		Type
High	1,150	High	750	LED	
Low	750	Low	450	20x 0.5W	

Continuous use

	BL1815N	BL1820	BL1830	BL1840	BL1850	BL1415	BL1430	BL1440
Low	5.0h	7.0h	10h	13h	17h	3.0h	6.0h	8.0h
High	2.5h	3.5h	5.0h	6.5h	8.5h	1.5h	3.0h	4.0h
Charging time	15min	24min	22min	36min	45min	15min	22min	36min

DC18RC

Cordless and Corded LED Worklight

DML805 AC or 18V, 14.4V



Dimensions (L x W x H) 214x261x328mm
(8-3/8"x10-1/4"x12-7/8")

Net weight* 2.3kg (5.2lbs) with BL1415
2.6kg (5.8lbs) with BL1850

*weight according to EPTA-Procedure 01/2003
Battery and charger are sold separately.

Items of standard equipment and specifications may vary by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN BF-AH